




# Cordless Power Cutter CE001G 355 mm (14")



High Power  
Durability  
Digital  
Communication

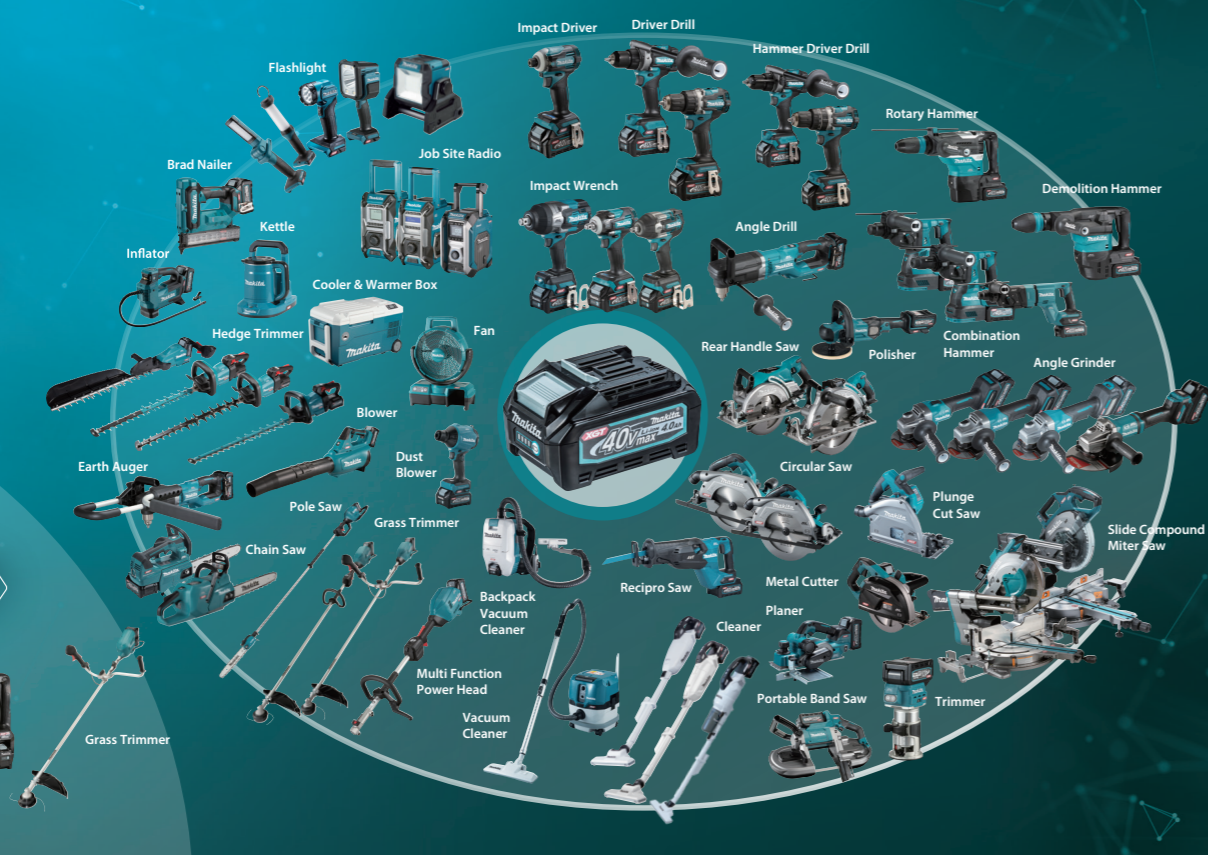

Efficiency of concrete cutting  
about **25% UP**  
Comparison with Engine tool

[ Cutting depth: 50mm ]

Low vibration  
Front handle    Rear handle  
**2.0/1.2**  
m/s

[ Concrete cutting ]

### Accessories

**Diamond wheel for concrete**  
Segmented type  
355 x 2.8 x 25.4  
Part No. E-12996 (EN)



**Abrasive cut-off wheel for Metal**  
355 x 4.3 x 25.4 A24T  
5per set  
Part No. E-12790-5



### Charging Time

	Fast Charging	
	DC40RA	DC40RC
BL4040 4.0Ah	45 min	67 min
*1BL4050F 5.0Ah	50 min	85 min
*1BL4080F 8.0Ah	76 min	170 min

\*1 Recommended battery

### Cordless Power Cutter

#### CE001G 355 mm (14")

- Brake
- Built-in Job Light

Wheel diameter	355 mm (14")
Wheel hole diameter	25.4 mm (1")
Max wheel thickness	5.0 mm (3/16")
Min. wheel thickness	2.0 mm (5/64")
Max cutting capacity	127 mm (5")
No load speed (RPM)	5,300
Vibration level	Concrete cutting, Front/ Rear: 2.5 / 2.5 m/s <sup>2</sup> or less
Sound pressure level	109 dB(A)
Sound power level	120 dB(A)
Dimensions (L x W x H)	w/ BL4040, BL4050F: 786 x 272 x 433 mm (31 x 10-3/4 x 17") w/ BL4080F: 786 x 283 x 433 mm (31 x 11-1/8 x 17")
Net weight	12.3 - 14.1kg (27.1 - 31.1 lbs.)

Standard Equipment : Wrench, Coupling Sleeve, Ring set, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.  
Items of standard equipment and specifications may vary by country or area.

## Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202202

Max. cutting capacity	Cutting work amount Battery: BL4050F x 2 Work volume on a single full battery charge
<b>127mm</b>	Cut concrete continuously: 50mm x 300mm Diamond wheel: 355mm
	<b>18cuts</b>



40V<sup>Li-ion</sup> max + 40V<sup>Li-ion</sup> max **XGT X2** 80V<sup>max</sup>

# More powerful than engine tools and Low vibration



### Concrete cutting speed

**CE001G 125**

Predecessor engine model **100**

slow speed fast

CE001G  
Battery: BL4050F x 2 (on a single full battery charge)

Cut concrete continuously: 50mm x 300mm  
Diamond wheel: 355mm




Max. cutting capacity  
**127mm**

### Equipped with anti-vibration housing

with built-in spring to absorb the vibration from cutting to integrated front and rear handles.

Low vibration  
Front handle Rear handle  
**2.0/1.2**  
m/s

[Concrete cutting]

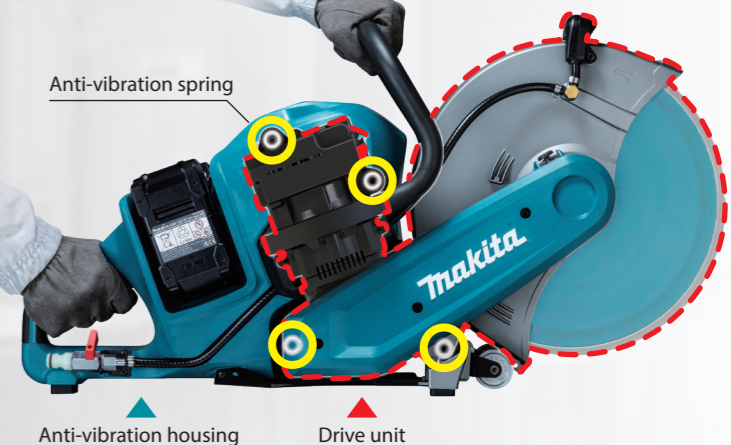

Anti-vibration housing Drive unit

**(BRAKE)** Electric brake

**XPT** eXtreme Protection Technology

Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather


**WG / IPX4**  
WET GUARD

High water-resistance allows to operate the machine even if it is wet with water.



### AFT Active Feedback sensing Technology

shuts down current to the motor, if the rotation speed suddenly slows down (in the case of kick-back, etc.).

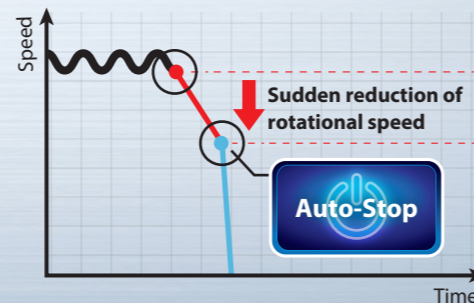

### LED job light



- can be turned on/off with a button conveniently located on the rear handle.
- automatically shuts off when the switch trigger is not pulled for 60 seconds.

### LED on/off button



Lock-off button

### Overload indicator lamp



Water supply kit can be connected.



Optional accessory