


Satisfy Professional's Needs



# Cordless Cut-Out Tool DCO181 6.35 mm (1/4")

**Higher performance &  
easier operation than  
corded tools**

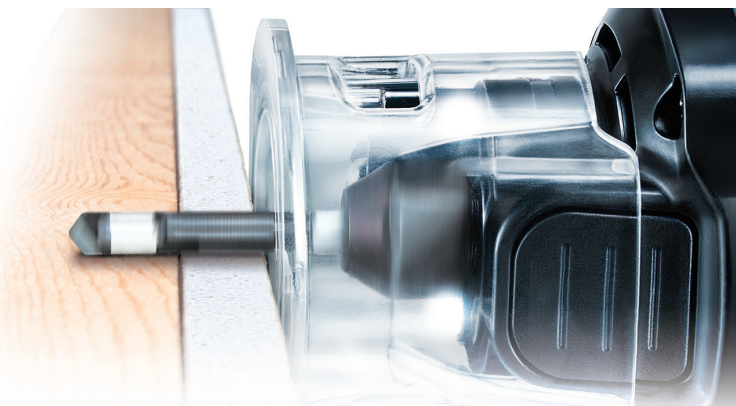

**High power**

Cuts a layer of two drywalls.  
( t=12.5mm )






# High power delivered by BL motor

Less vibration

**0.66 m/s<sup>2</sup>**

Due to the spindle integrated with the motor shaft.

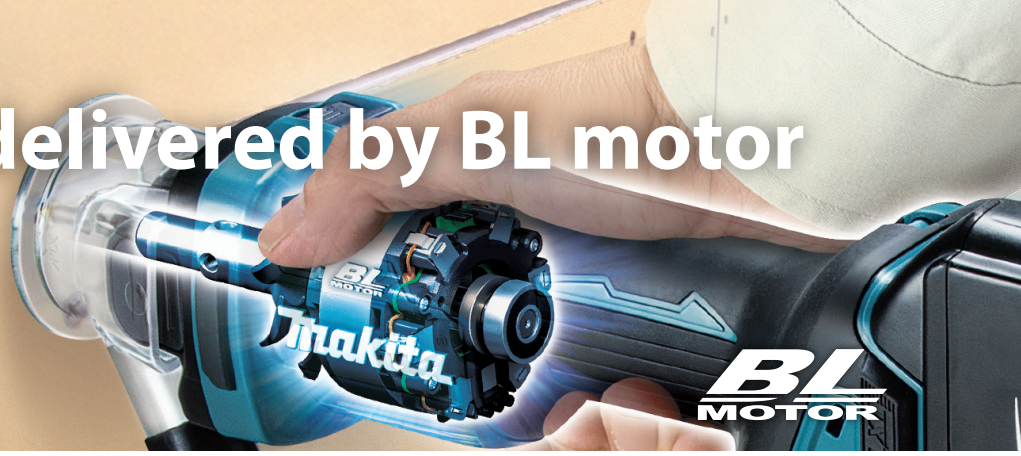

## Compact and lightweight

While enabling an excellent cutting performance, use of a BL motor allows for a compact and lightweight design and provides easier operation in overhead applications or in tight places.

Lightweight

**1.6 kg**

Battery: BL1850B

Twin LED job light with afterglow function



**311 mm**



**XPT**

Extreme Protection Technology

## Quick depth adjustment

No tools required for depth adjustment. Can be adjusted to desired depth.



## Shoe plate

Can be used as a wrench for bit replacement.



## AWS Auto-start Wireless System

The wireless activation function enables clean and comfortable operation. By connecting a supported tool to the cleaner, you can run the cleaner automatically along with the switch operation of the tool.



## Accessories

### Dust Collection Cover

Part No. 193449-2



### Drywall Guide Bit Set

size	Part No.
3.18	191G69-8
3.18	191G68-0
3	193450-7



### Flash Bit

size	Part No.
6 x 6	D-08218



### Collet Cone

size	Part No.
6.35	197038-0
6.35	763676-1
3.18	763677-9
6.0	763678-7
3.0	763679-5



### Circular Guide Set

Circular cutting diameters 10cm - 34cm  
Part No. 193448-4



### Hook Set

Part No. 195779-7



## Charging Time

	DC18RC	DC18SD
<b>BL1815N</b> 1.5Ah	<b>15 min</b>	<b>30 min</b>
<b>BL1820B</b> 2.0Ah	<b>24 min</b>	<b>45 min</b>
<b>BL1830B</b> 3.0Ah	<b>22 min</b>	<b>60 min</b>
<b>BL1840B</b> 4.0Ah	<b>36 min</b>	<b>90 min</b>
<b>BL1850B</b> 5.0Ah	<b>45 min</b>	<b>110 min</b>
<b>BL1860B</b> 6.0Ah	<b>55 min</b>	<b>130 min</b>

## Cordless Cut-Out Tool

### DCO181 6.35 mm (1/4")

Brake	<b>Collet Capacity</b> 3 mm, 6 mm or 3.18 mm (1/8"), 6.35 mm (1/4")
Soft Start	<b>No Load Speed (RPM)</b> 32,000
Dust Collection	<b>Circumference of Grip Portion</b> 210 mm (8-1/4")
Built-in Job Light	<b>Vibration Level</b> Rotation w/o Load: 2.5 m/s <sup>2</sup> or less
Carrying Case	<b>Sound Pressure Level</b> 78 dB(A)
	<b>Dimensions (L x W x H)</b> w/ BL1815N / BL1820B: 293x79x117 mm (11-1/2"x3-1/8"x4-5/8")
	w/ BL1830B / BL1840B / BL1850B / BL1860B: 311x79x117 mm (12-1/4"x3-1/8"x4-5/8")
	<b>Net weight</b> 1.4 - 1.7* kg (3.1 - 3.7* lbs.)
	*with Battery BL1850B, Dust collection cover, Shoe plate

**Standard Equipment:** Drywall Guide Bit, Collet Cone, Dust Collection Cover, Wrench, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202008