


**18V**  
LITHIUM-ION

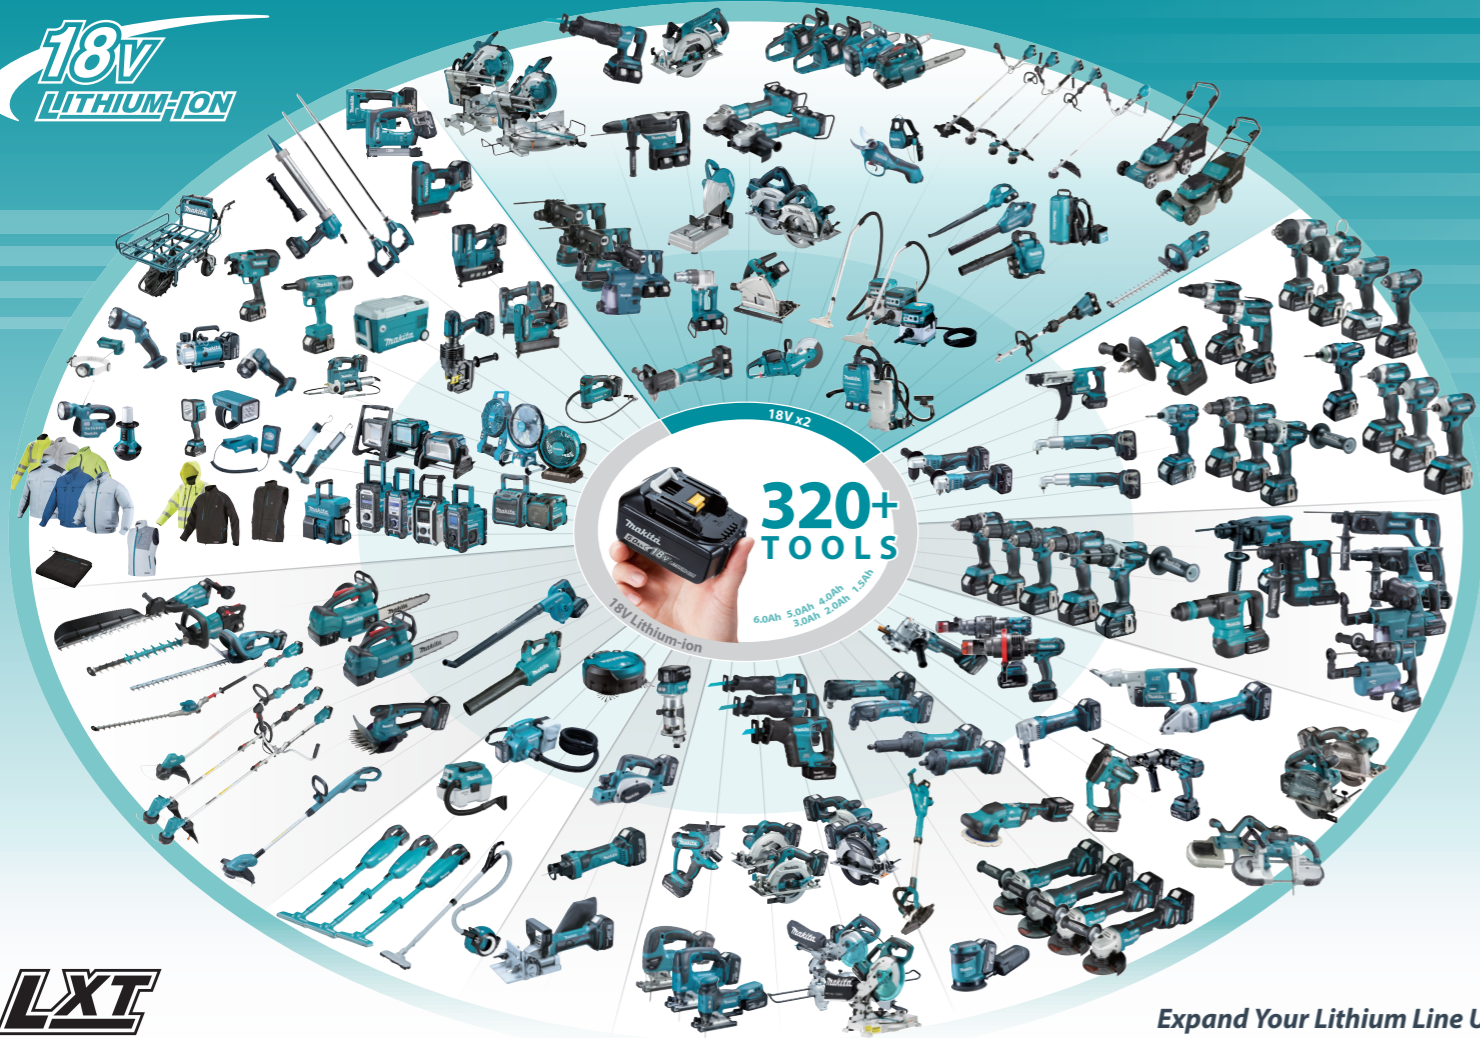

**LXT**

Expand Your Lithium Line Up

■ Connect Electricity

**Cordless Fan Jacket**  
**Cordless Fan Vest**

DFJ216 / DFJ310  
DFJ416 / DFJ212  
DFJ213 / DFJ214  
DFV210



**Cordless Fan**  
DCF203



**Job Site Radio**  
DMR114 / DMR115



**Cordless Job Site Speaker**  
DMR203



**Cordless Coffee Maker**  
DCM501




**Cordless Heated Jacket**  
**Cordless Heated Vest**

DCJ205 / DCJ206  
DCV202



**Cordless Heated Blanket**

DCB200



Charging Time

Battery Model	18V LITHIUM-ION		
	DC18RC	DC18RD	DC18SD
BL1815N 1.5Ah	15 min	30 min	
BL1820B 2.0Ah	24 min	45 min	
BL1830B 3.0Ah	22 min	60 min	
BL1840B 4.0Ah	36 min	90 min	
BL1850B 5.0Ah	45 min	110 min	
BL1860B 6.0Ah	55 min	130 min	

**Cordless Cooler and Warmer Box**  
**DCW180**

Capacity	20 L (5.3 gal)
Cooling System	Compressor type
Cooling Capacity	-18 / -10 / 0 / 5 / 10°C (0 / 15 / 30 / 40 / 50°F)
Warming System	Heater
Warming Capacity	55 / 60°C (130 / 140°F)
Run Time	w/ BL1860B X2, -18°C / 5°C / 60°C: 5h / 17h / 4h
Cord Length	AC Adapter / Cigar Socket Cable: 2 / 2.5 m (6.5 / 8.2 ft)
Thermal Insulation Thickness	33 mm
Dimensions (L x W x H)	623x341x371.5 mm (24-1/2"x13-3/8"x14-5/8")
Net weight	13.3 - 14.3 kg (29.3 - 32.0 lbs.)

Standard Equipment:  
Shoulder Belt, AC Adaptor, Cigar Socket Cable

Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202010

**Makita**

**Cordless Cooler and Warmer Box**  
**DCW180**

Satisfy Professional's Needs

**LXT**

**Keep cold, Keep warm**



**Cool**  
**-18°C ~ 10°C**  
**[0°F ~ 50°F]**

**Warm**  
**55°C ~ 60°C**  
**[130°F ~ 140°F]**

Large capacity  
**20 L**

**IPX4**

**18V**  
LITHIUM-ION

# Cordless Cooler and Warmer Box



**Cooling capacity**  $-18^{\circ}\text{C} \sim 10^{\circ}\text{C}$   
 [0°F ~ 50°F]  
 Five inside temperature settings

**Warming capacity**  $55^{\circ}\text{C} \sim 60^{\circ}\text{C}$   
 [130°F ~ 140°F]  
 Two inside temperature settings

## Long run time



Work amount on a single full battery charge (BL1860B x2)\*

$-18^{\circ}\text{C}$ [0°F]	$5^{\circ}\text{C}$ [40°F]	$60^{\circ}\text{C}$ [140°F]
about <b>5h</b>	about <b>17h</b>	about <b>4h</b>

## Compatible with 3 power sources:



18V LXT battery (two in parallel or one)



AC (through AC adapter)



12V/24V DC (cigar socket)




IPX4 water resistance when powered by battery

USB output port Type A for DC5V/ 2.4A

Bottle opener Conveniently located for opening glass bottles

## 20L (5.3gal) capacity



500mL plastic bottles x20



2L plastic bottles x4

## Seven inside temperature settings

Cooling capacity				Warming capacity	
$-18^{\circ}\text{C}$ /0°F	$-10^{\circ}\text{C}$ /15°F	$0^{\circ}\text{C}$ /30°F	$5^{\circ}\text{C}$ /40°F	$10^{\circ}\text{C}$ /50°F	$55^{\circ}\text{C}$ /130°F
					$60^{\circ}\text{C}$ /140°F

\*Operating times are approximate and may differ depending on battery type, charging status, and usage condition.