

XGT
40V Li-ION
max

40Vmax
series
movie




40Vmax
mechanism
movie



This movie was filmed
in Japan.
Models and specs may
vary by country.

High Power
Durability
Digital Communication

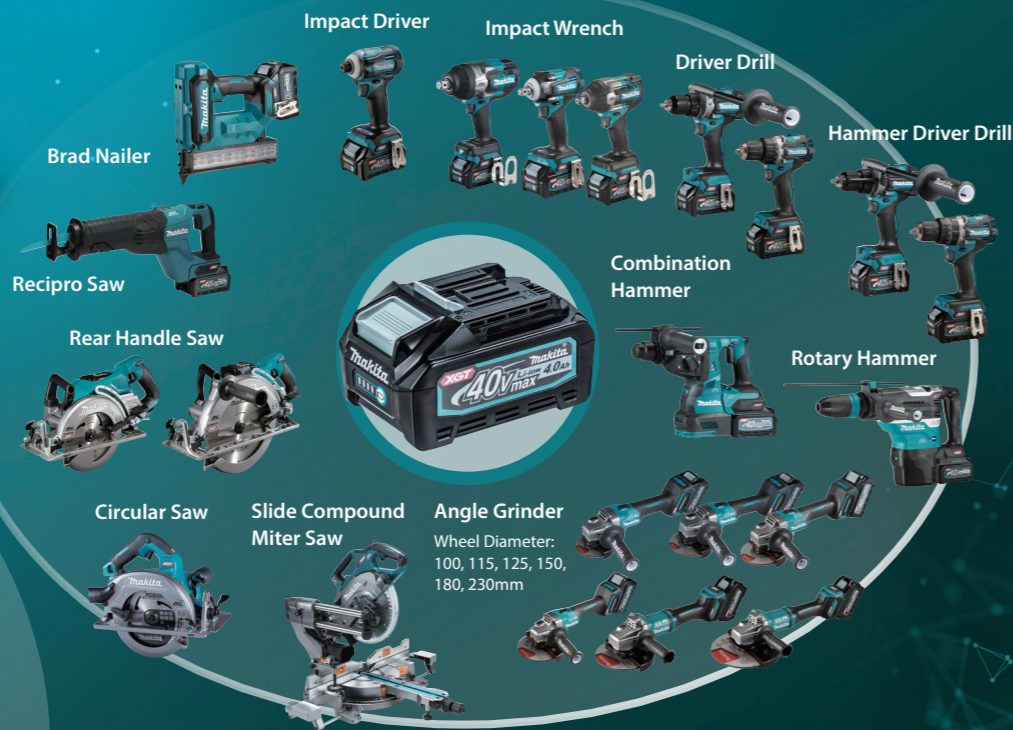

XGT
40V Li-ION
max **XGT X2**
80V max

Rotary Hammer
HR006G



Demolition Hammer
HM002G



Makita

Cordless Demolition Hammer
HM001G Adapted for SDS-MAX bits

Satisfy Professional's Needs

XGT

XGT

40V Li-ION
max

Impact energy
[EPTA-Procedure 05/2009]

9.4
Joule

Portable Power Pack

PDC01

Powered by up to four 18V LXT batteries



PDC1200

Equipped with built-in battery cells

Charger:
DC4001

Charging time:
6hours



Adapter set (40Vmax)

Part No. 191N62-4



photo: HR005G

Accessories

Dust Extractor Attachment Set

without Vacuum hose set
Part No. 199143-4
with Vacuum hose set
Part No. 199144-2



Side handle

Part No. 136362-1



Charging Time Reference

	DC40RA FastCharger	DC40RC
	45min	67min
	50min	85min

Cordless Demolition Hammer

HM001G Adapted for SDS-MAX bits

	Variable Speed	EPTA-Procedure 05/2009: 9.4 J
	SDS-MAX Shank	0 - 2,650
	Blows Per Minute (BPM)	18 mm (11/16")
	Sound Pressure Level	89 dB(A)
	Sound Power Level	100 dB(A)
	Vibration Level	Chiselling Function w/ Side Handle: 6.0 m/s ²
	Dimensions (L x W x H)	Chiselling Function w/ Side Grip: 5.5 m/s ²
		w/ BL4040:
		496 x 113 x 258 mm (19-1/2 x 4-7/16 x 10-1/8")
		w/ BL4050F: 516 x 113 x 280 mm (20-1/4 x 4-7/16 x 11")
	Net weight	6.3 - 7.1 kg (13.9 - 15.7 lbs.)

Standard Equipment: Bull Point, Bit Grease, Side Grip (country-specific), Wireless Unit (country-specific), Wireless Unit Adapter (country-specific), Cloth, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202102

Higher power
than corded tools

BL MOTOR **AWS** **AVT** **SOFT** NO LOAD **XPT**

Impact energy
[EPTA-Procedure 05/2009]

9.4
Joule


HM001G 9.4 Joule

AC tools 8.1 Joule

Anti-Vibration Technology

AVT Vibration level at main handle
6.0 m/s²



Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.

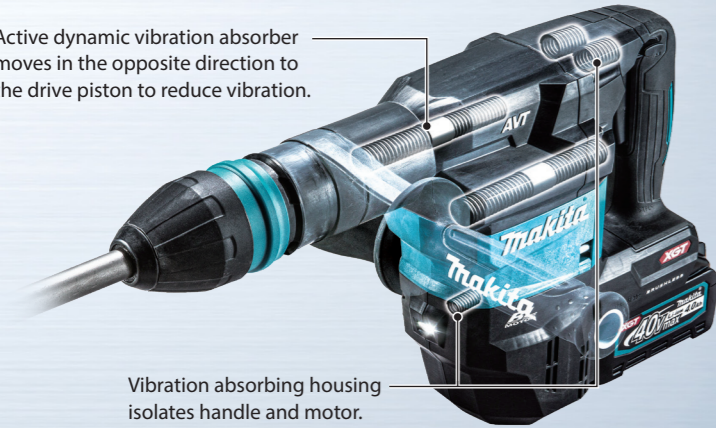

Vibration absorbing housing isolates handle and motor.

SOFT NO LOAD

Suppression of motor speed during no-load



BL MOTOR

High power
Brushless motor



Work amount


Chipped concrete and measured the amount of concrete removed / Concrete with compressive strength of 40N/mm²

about **20%**
UP
with BL4040



AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.

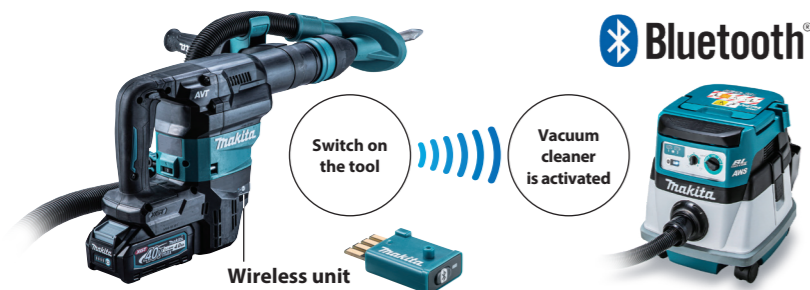

XPT eXtreme Protection Technology



Adapted for SDS-MAX bits

12 bit angle settings

Type


Side grip



Side handle (option)



Twin LED job lights



Slide lever for trigger lock-on / lock-off

Trigger lock-on/lock-off can be set simply by pushing the slide lever:
• For lock-on of the trigger, pull and hold the trigger, then push the slide lever.
• For lock-off of the trigger, push the slide lever without pulling the trigger.



5-stage max speed selection by dial with variable control by trigger in each range enables user to match the speed to the application for greater versatility.