

**XGT**  
**40V<sup>Li-ION</sup>max**

40Vmax  
series  
movie



40Vmax  
mechanism  
movie



This movie was filmed  
in Japan.  
Models and specs may  
vary by country.

**High Power**  
**Durability**  
**Digital Communication**



Circular Saw  
HS003G / HS004G

Angle Grinder  
GA003G / GA004G / GA005G /  
GA006G / GA007G / GA008G /  
GA011G / GA012G / GA013G /  
GA014G / GA015G / GA016G

Combination Hammer  
HR001G / HR002G /  
HR003G / HR004G

Rotary Hammer  
HR005G



**XGT**  
**40V<sup>Li-ION</sup>max** **XGT X2**  
**80V<sup>max</sup>**

Rotary Hammer  
HR006G      Demolition Hammer  
HM002G

**Portable Power Pack**

**PDC01** Powered by up to four 18V LXT batteries



**PDC1200** Equipped with built-in battery cells



**Adapter set (40Vmax)**  
Part No. 191N62-4



**Accessories**

**Dust Extractor Attachment Set**



**Cordless Rotary Hammer**  
**HR005G 40 mm (1-9/16") Adapted for SDS-Max bits**

	Variable Speed	<b>Impact Energy</b>	EPTA-Procedure 05/2009: 8 J
	Brake	<b>Capacity</b>	Concrete (w/ TCT Bit): 40 mm (1-9/16")
	SDS-MAX Shank	<b>Blows Per Minute (BPM)</b>	1,450 - 2,900
	Torque Limiter	<b>No Load Speed (RPM)</b>	250 - 500
	Constant Speed	<b>Sound Pressure Level</b>	91 dB(A)
	Soft Start	<b>Sound Power Level</b>	102 dB(A)
	Dust Collection	<b>Vibration Level</b>	Hammer Drilling into Concrete: 5.0 m/s <sup>2</sup> Chiselling Function w/ Side Grip: 4.0 m/s <sup>2</sup> Chiselling Function w/ Side Handle: 4.0 m/s <sup>2</sup>
	Built-in Job Light	<b>Dimensions (L x W x H)</b>	w/o Battery: 477 x 115 x 286 mm (18-3/4 x 4-1/2 x 11-1/4") w/ BL4040: 500 x 115 x 286 mm (19-3/4 x 4-1/2 x 11-1/4") w/ BL4050F: 520 x 115 x 305 mm (20-1/2 x 4-1/2 x 12")
	Carrying Case	<b>Net weight</b>	7.4 - 8.2 kg (17.0 - 18.1 lbs.)
		<b>Standard Equipment</b>	Side Handle, Side Grip, Depth Gauge, Bit Grease, Cloth, Wireless Unit (country-specific), Wireless Unit Adapter (country-specific), Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**  
3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202012

Satisfy Professional's Needs



**Makita** Cordless Rotary Hammer  
**HR005G 40 mm (1-9/16") Adapted for SDS-Max bits**

**XGT**  
**40V<sup>Li-ION</sup>max**

Impact energy  
[EPTA-Procedure 05/2009]  
**8.0**  
Joule

**As powerful  
as AC tools**

Net weight  
**7.7 kg**  
with BL4040



**BL MOTOR** **AFT** **AWS** **AVT** **SOFT NO LOAD** **XPT**

Impact energy  
[EPTA-Procedure 05/2009]

**8.0**  
Joule

diameter 32mm (1-1/4") / Drilled holes to a depth of 140 mm / Concrete with compressive strength of 40N/mm<sup>2</sup>

<b>HR005G 105</b>	
AC tools	100
slow	fast

## Anti-Vibration Technology

**AVT** Vibration level at main handle  
**5.0 m/s<sup>2</sup>**

Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.



Damper spring absorbs impact vibrations from the drill bit.

Vibration absorbing housing isolates handle and motor.

**SOFT NO LOAD**



**2 mode**  
Rotation + Hammering ◀ ▶ Hammering

## AFT Active Feedback sensing Technology


turns the motor off if bit rotation is suddenly forced to stop.



**STOP**

## AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.

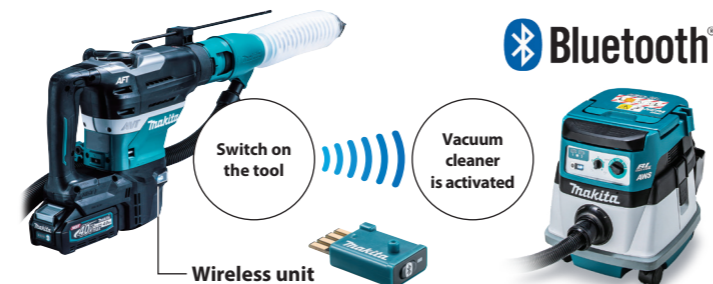

**Bluetooth**


Switch on the tool

Vacuum cleaner is activated

Wireless unit

## XPT

eXtreme Protection Technology

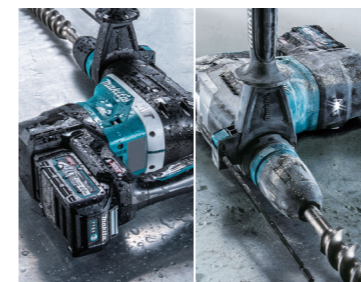

Type

Side grip



Side handle



Twin LED job lights



Variable speed control dial



**BL MOTOR**