



Cordless Circular Saw HS011G 260 mm (10-1/4") / 270 mm (10-5/8")



XGT
40V Li-ion
max



Lightweight
with BL4050F

6.1 kg

Max cutting depth
with 270mm saw blade

101 mm

Work amount
on a single full battery charge
Melapi (Thickness: 90mm /
Width: 1,000mm / Bevel angle: 0°)
with BL4050F

40 cuts



High power and lightweight design

BL MOTOR

Rotatable dust nozzle

Sub base

Sub base can be used as Guide rule by turning up side down.

Magnesium diecast

Base plate, Safety cover and Blade case

Compatible with guide rail without adapter providing precision cutting

Twin LED Job light

with pre-glow and after glow functions



Bevel cuts up to 1° left and 60° right.




Constant speed control

minimizes reduction in rotation speed under load, keeping operation efficiency.

XPT eXtreme Protection Technology

AFT Active Feedback sensing Technology

shuts down current to the motor, if the rotation speed suddenly slows down (in the case of kick-back, etc.).

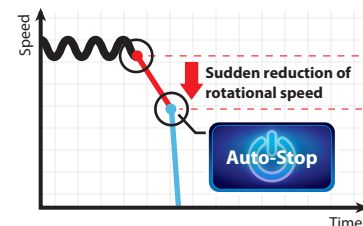

AWS Auto-start Wireless System

The wireless activation function enables clean and comfortable operation. By connecting a supported tool to the cleaner, you can run the cleaner automatically along with the switch operation of the tool.



Wireless unit is compatible with all supported tools

Electric brake


Accessories

Specialized EFFICUT blade



Size (mm)	Part No.
260x 2.15 x 25 x 24T	E-07733
270 x 2.15 x 25.4 x 24T	E-12974

Guide rail



Overall length (m)	Part No.
1	199140-0
1.4	194368-5
1.5	199141-8
1.9	194925-9
3	194367-7

Clamp set



Part No. type A: 194385-5
type B: 199826-6

Bevel guide set



Adjustable angle of Guide rail
Part No. 196664-7

Guide rail bag



For 1.0m Guide rail
Part No. E-05670
For 1.4m, 1.5m Guide rail
Part No. E-05664

Guide rail Joint connector 2pc set



Part No. 198884-9
198885-7(EU)

Charging Time

40V ^{Li-ion} max	Fast Charging	
	DC40RA	DC40RC
BL4020 2.0Ah	22 min	30 min
BL4025 2.5Ah	28 min	38 min
BL4040 4.0Ah	45 min	67 min
*1 BL4050F 5.0Ah	50 min	85 min
*1 BL4080F 8.0Ah	76 min	170 min

*1 Recommended battery

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Cordless Circular Saw

HS011G 260 mm (10-1/4") / 270 mm (10-5/8")

- Brake
- Constant Speed
- Soft Start
- Dust Collection
- Built-in Job Light

Hole Diameter	15.88, 25, 25.4, 30 mm (5/8, 1")
Max Cutting Capacity	0°: 97 - 101 mm (3-13/16 - 4") 45°: 68 - 71 mm (2-11/16 - 2-13/16") 60°: 48 - 51 mm (1-7/8 - 2")
No Load Speed (RPM)	3,500
Vibration Level	2.5 m/s ² or less
Sound Pressure Level	93 dB(A)
Sound Power Level	104 dB(A)
Dimensions (L x W x H)	w/ BL4020 / BL4025 / BL4040 / BL4050F or w/o Battery: 453 x 196 x 336 mm (17-7/8 x 7-3/4 x 13-1/4") w/ BL4080F: 453 x 214 x 336 mm (17-7/8 x 8-3/8 x 13-1/4")
Net weight	5.5 - 6.7 kg (12.1 - 14.8 lbs.)

Standard Equipment: TCT Saw Blade, Sub Base, Hex Wrench, Battery, Charger

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202201