



Cordless Worklight ML005G 40Vmax / 18V



XGT
40V **Li-ion**
max

18V
LITHIUM-ION

Max luminous flux

3,600 lm



Continuous run time(approx)
on a full battery charge

High / Medium / Low

3.5 / 7.5 / 15 h

Battery: BL4040

Powered by:

- 40Vmax XGT Li-ion battery
- 18V LXT Li-ion battery





40V^{Li-ion}max

18V^{Li-ion}LITHIUM-ION

Max luminous flux
3,600 lm



3 brightness settings
with memory function that remembers the brightness setting last time you power off.

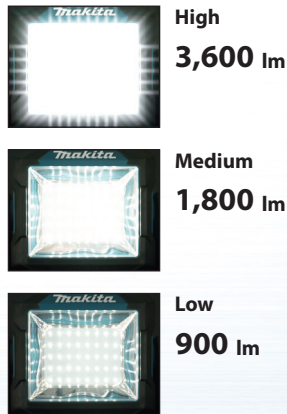

Front: about **6 m**
Side: about **6.4 m**



Distance

Battery capacity warning function




Automatically notifies the user about a decrease in battery capacity with a reduction in illuminance.

Carrying handle



Compact design with a short height thanks to the retractable carrying handle

Angle adjustment



Knob for free adjustment of light angle enables the light source to rotate from -30° to 210° to a desired angle.

Dust and water resistance
(only with DC power)

IP65

For use in outdoor applications or harsh environments

Accessories

Lamp shade

Part No. GM00002358


- provides widespread illumination and reduces the glare of LED light.
- reduces multiple shadows.



Anti-glare film

Part No. GM00002359

reduces glare.



Light stand

Part No. GM00002073



Charging Time

	Fast Charging			Fast Charging	
	DC40RA	DC40RC		DC18RC	DC18SD
*1 BL4020 2.0Ah	22 min	30 min	BL1815N 1.5Ah	15 min	30 min
*1 BL4025 2.5Ah	28 min	38 min	BL1820B 2.0Ah	24 min	45 min
*1 BL4040 4.0Ah	45 min	67 min	BL1830B 3.0Ah	22 min	60 min
*1 BL4050F 5.0Ah	50 min	85 min	BL1840B 4.0Ah	36 min	90 min
*1 BL4080F 8.0Ah	76 min	170 min	BL1850B 5.0Ah	45 min	110 min
			BL1860B 6.0Ah	55 min	130 min

*1 Recommended battery

The weight does not include battery cartridge

Items of standard equipment and specifications may vary by country or area.

Cordless Worklight

ML005G

Illuminance	at 1m from the light source
(High / Mid / Low)	: 2,100 / 1,000 / 500 lx
Luminous Flux	High / Mid / Low: 3,600 / 1,800 / 900 lm
Continuous illumination	High / Mid / Low: 3.5 / 7.5 / 15 h
Dimensions	w/ Handle in Retracted Position
(L x W x H)	: 248 x 309 x 296 mm
	(9-3/4 x 12-1/8 x 11-5/8")
	w/ Handle in Upright Position
	: 248 x 309 x 423 mm
	(9-3/4 x 12-1/8 x 16-5/8")
Net weight	4.6 - 6.5 kg (10.1 - 14.3 lbs.)

Standard Equipment : Anti-glare film
Battery & Charger Sold Separately

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202205