



**Job Site Radio**  
**MR001G / MR002G**  
**MR003G / MR004G**  
 12Vmax-40Vmax / AC

Satisfy Professional's Needs



**Newly Compatible  
 with 40Vmax XGT  
 Li-ion Batteries**



photo: MR002G



MR001G



MR002G



MR003G



MR004G

	dab+	Bluetooth®
MR001G	—	—
MR002G	—	✓
MR003G	✓	—
MR004G	✓	✓


Powered by AC or DC



# Bluetooth®


MR002G / MR004G only  
equipped with Bluetooth class 2\*\* to wirelessly play music from a mobile device.  
\*\*With a range of 10m (33ft); up to 30m (100ft) in good radio conditions

**Dust and shower-proof construction: IP65**  
(when using battery)



## Dual power sources

Runs on AC adapter or Makita rechargeable Li-ion batteries.

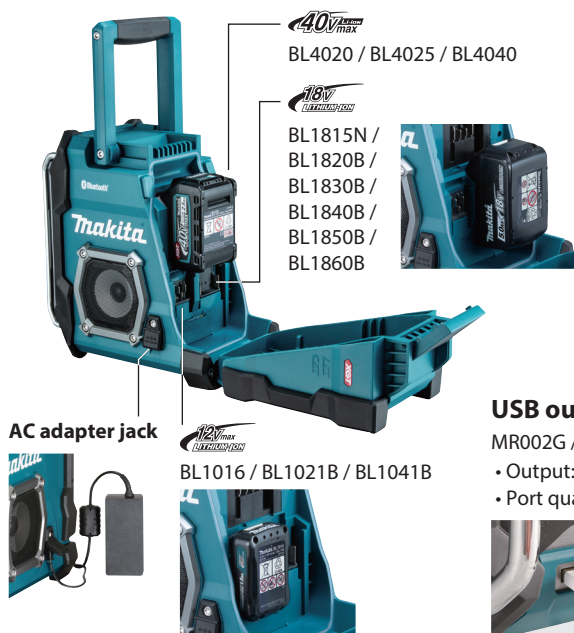

MR003G / MR004G only

Carry handle with built in FM antenna



photo: MR002G

## USB output port

MR002G / MR004G only  
• Output: 2.4A  
• Port quantity: 1



## AUX-IN jack

used as a stereo speaker by connecting to external audio source with a commercial connecting cable.

## Increased speaker size

**89 mm x2**

## Continuous run time (approx): hour

On a single full battery charge

MR001G / MR002G / MR003G / MR004G

	Battery	8	7.5	9.5	8.5
<b>12V max</b>	BL1016(1.5Ah)	8	7.5	9.5	8.5
	BL1021B(2.0Ah)	11	9.5	12.5	11
	BL1041B(4.0Ah)	19.5	18.5	23.5	21
<b>18V</b>	BL1815N(1.5Ah)	7.5	6.5	8.5	7.5
	BL1820B(2.0Ah)	10	9	11	10
	BL1830B(3.0Ah)	14	12.5	16	14
	BL1840B(4.0Ah)	20	17.5	22	20
	BL1850B(5.0Ah)	25.5	23	29	26
	BL1860B(6.0Ah)	31	27.5	34	31
<b>40V max</b>	BL4020(2.0Ah)	14.5	13.5	17	15
	BL4025(2.5Ah)	18.5	17	21	19
	BL4040(4.0Ah)	30	27.5	34	30

## Job Site Radio

**MR001G / MR002G / MR003G / MR004G** 12Vmax-40Vmax / AC

<b>Frequency Band</b>	MR001G / MR002G: FM / AM: 87.5 - 108 MHz / 522 - 1,710 kHz MR003G / MR004G: FM / DAB / DAB+: 87.5 - 108 MHz / 174.928 - 239.200 MHz / 174.928 - 239.200 MHz
<b>Speaker Size</b>	Woofer: Dia. 89 mm x2
<b>Max Output</b>	MR001G / MR002G: 40Vmax: 5 W x2 MR003G / MR004G: 40Vmax: 4.9 W x2
<b>Bluetooth (MR002G / MR004G only)</b>	Version: 5.0 Profile: A2DP / SCMS-T MR001G / MR002G: Supported Codec: SBC MR003G / MR004G: Supported Codec: SBC / AAC Max Transmission Range (Optimum): 10 m (33 ft) Max Transmission Range (Possible): 30 m (98 ft) Transmission Power Class: 2 Compatible Bluetooth Profile: A2DP
<b>Dimensions (L x W x H)</b>	w/ Handle in Upright Position: 280 x 171 x 434 mm (11 x 6-3/4 x 17-1/8")
<b>Net weight</b>	4.6 - 5.4 kg (10.1 - 11.9 lbs.)

**Standard Equipment:** AC Adaptor, AA Battery (MR001G / MR002G only)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202101