



Cordless Hedge Trimmer Series



40V Li-ion max



Beyond cordless hedge trimmer

Optimum blade shape for smooth cutting of thin branches

Sharp edge curve Blade

UH004G
600 mm (23-5/8")

UH005G
750 mm (29-1/2")



Optimum for rough cutting of thick branches

Sharp edge Blade

UH006G
600 mm (23-5/8")



UH007G
750 mm (29-1/2")



Standard Blade

UH008G
600 mm (23-5/8")

UH009G
750 mm (29-1/2")



Run time*

High/ Med/ Low Model: UH004G / Battery: BL4040

85/ 160/ 370 min

Strokes per minute

High speed mode (No load speed)


5,000 min⁻¹



*Continuous run time on a single full battery charge/ No load continuous run time (approx)




BL motor provide high power and excellent cutting performance

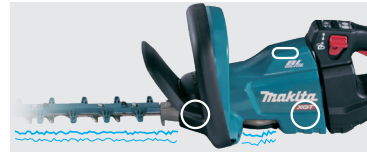


Anti-vibration structure
consisting of Motor-crank section and handle section linked by cushions to absorb vibration from blade and motor-crank section




5 position rotating rear handle

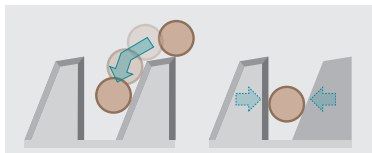

Twigs are caught easily and held firmly
Sharp edge curve Blade / Sharp edge Blade
UH004G / UH005G UH006G / UH007G

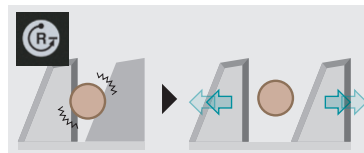


Reverse rotation system
release the blade when it is jammed by thick branches.

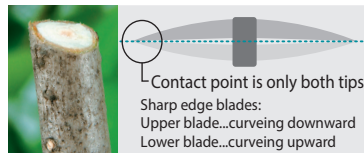


Optimum blade shape for smooth cutting
Sharp edge curve Blade
UH004G / UH005G



3-speed
High
Medium
Low

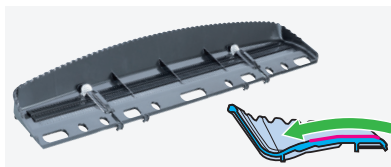

NEW Chip receiver
can make it easier for user to collect leaf and twig debris, thanks to:
- lower height of the connecting hooks
- reduced step height of the edge of the chip catching plate

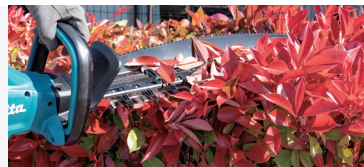

Wet Guard
High water-resistance allows to operate the machine even if it is wet with water.



eXtreme Protection Technology
Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather

Accessories



Model	Shear blade assembly	Blade Cover	Chip receiver assembly set
UH004G	191R53-9	412911-1	191R51-3
UH005G	191R54-7	412912-9	191R52-1
UH006G	191R55-5	412911-1	191R51-3
UH007G	191R56-3	412912-9	191R52-1
UH008G	191R57-1	459121-9	191R51-3
UH009G	191R58-9	459122-7	191R52-1

Charging Time Reference

	DC40RA Fast Charging	DC40RC
*1BL4020 2.0Ah	22min	30min
*1BL4025 2.5Ah	28min	38min
*1BL4040 4.0Ah	45min	67min
BL4050F 5.0Ah	50min	85min

*1 Recommended battery

Cordless Hedge Trimmer UH004G, UH005G, UH006G, UH007G, UH008G, UH009G

	UH004G	UH005G	UH006G	UH007G	UH008G	UH009G
Brake	600 mm (23-5/8")	750 mm (29-1/2")	600 mm (23-5/8")	750 mm (29-1/2")	600 mm (23-5/8")	750 mm (29-1/2")
Reversing	23.5 mm (15/16")	23.5 mm (15/16")	25.0 mm (1")	25.0 mm (1")	21.5 mm (7/8")	21.5 mm (7/8")
Electronic 3-Speed	High / Mid / Low: 5,000 / 3,600 / 2,000 (SPM)	High / Mid / Low: 5,000 / 3,600 / 2,000 (SPM)	High / Mid / Low: 4,000 / 3,000 / 2,000 (SPM)	High / Mid / Low: 4,000 / 3,000 / 2,000 (SPM)	High / Mid / Low: 5,000 / 3,600 / 2,000 (SPM)	High / Mid / Low: 5,000 / 3,600 / 2,000 (SPM)
Constant Speed	85 dB(A)	86 dB(A)	81 dB(A)	81 dB(A)	82 dB(A)	83 dB(A)
Anti Vibration	96 dB(A)	97 dB(A)	92 dB(A)	92 dB(A)	93 dB(A)	94 dB(A)
	Vibration Level 2.9 / 2.5 m/s ² or less	Front / Rear: 3.1 / 2.7	Front / Rear: 3.0 / 2.5 m/s ² or less	Front / Rear: 3.4 / 3.1	Front / Rear: 3.1 / 2.5 m/s ² or less	Front / Rear: 3.2 / 2.5
	Dimensions (L x W x H) w/ BL4020 / BL4025: 1,120 x 223 x 191 mm (44 x 8-3/4 x 7-1/2")	w/ BL4020 / BL4025: 1,263 x 223 x 191 mm (49-3/4 x 8-3/4 x 7-1/2")	w/ BL4020 / BL4025: 1,123 x 223 x 191 mm (44-1/4 x 8-3/4 x 7-1/2")	w/ BL4020 / BL4025: 1,274 x 223 x 191 mm (50-1/4 x 8-3/4 x 7-1/2")	w/ BL4020 / BL4025: 1,120 x 223 x 191 mm (44 x 8-3/4 x 7-1/2")	w/ BL4020 / BL4025: 1,262 x 223 x 191 mm (49-3/4 x 8-3/4 x 7-1/2")
	Net weight 4.3 - 4.9 kg (9.5 - 10.8 lbs.)	4.5 - 5.1 kg (9.9 - 11.2 lbs.)	4.4 - 5.0 kg (9.7 - 11.0 lbs.)	4.6 - 5.2 kg (10.1 - 11.5 lbs.)	4.3 - 4.9 kg (9.5 - 10.8 lbs.)	4.4 - 5.0 kg (9.7 - 11.0 lbs.)

Standard Equipment : Blade Cover, Safety Goggles (country-specific), Chip Receiver, Battery, Charger

The weight does not include accessories but battery cartridge(s). The lightest and heaviest combination weight of the appliance and battery cartridge(s) are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202105