

XGT
40V L^{ION} max

40Vmax
mechanism
movie




This movie was filmed
in Japan.
Models and specs may
vary by country.

High Power
Durability
Digital
Communication



XGT
40V L^{ION} max **XGT X2**
80V max

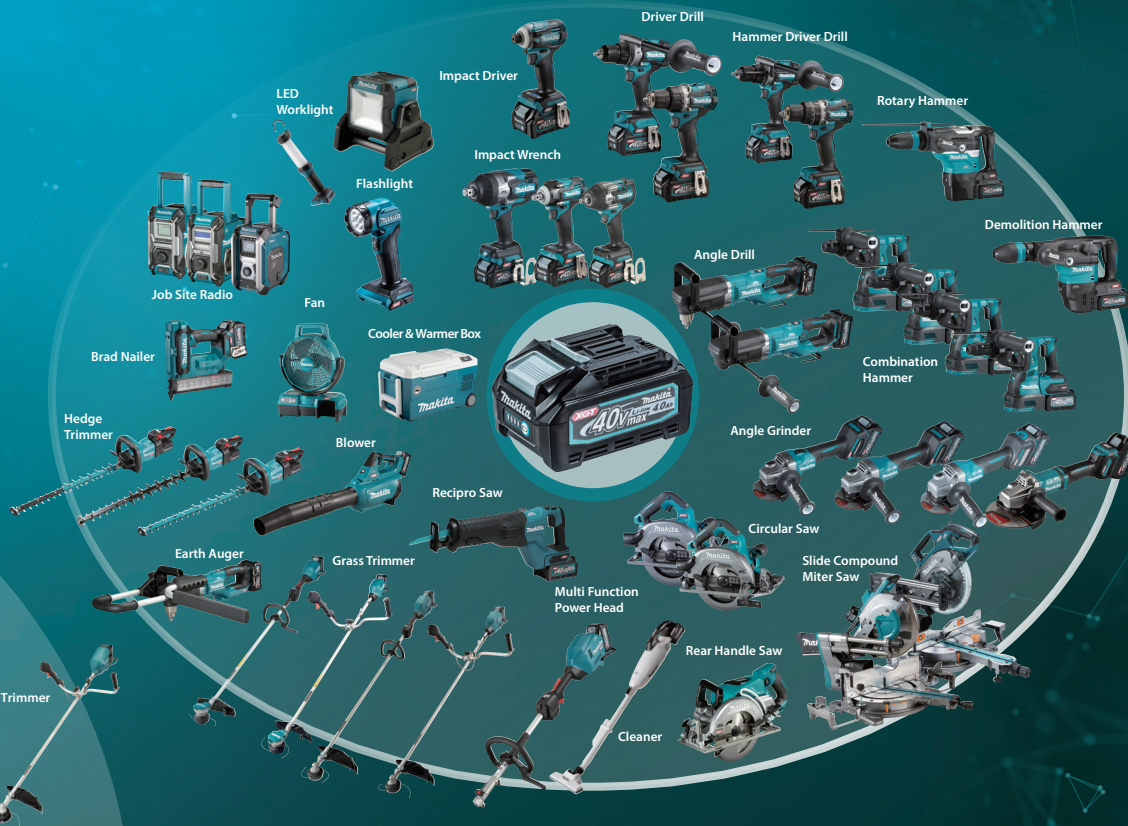

Makita

Cordless Cooler & Warmer Box
CW001G

Satisfy Professional's Needs

XGT
LXT

XGT
40V L^{ION} max

18V
LITHIUM-ION

-18°C Cool ~ **60°C** Warm [**0°F** ~ **140°F**]

Keep cold, Keep warm

Accessories

AC adapter



Connect Electricity

Cordless Fan



Job Site Radio



LED Flashlight /
Cordless Worklight



Cordless
Coffee Maker



Adapter
for USB



Charging Time

| | Fast Charging | | | Fast Charging | | |
|--|---------------|--------|---|---------------|---------|--------|
| | DC40RA | DC40RC | | DC18RC | DC18RD | DC18SD |
| 40V L^{ION} max BL4020 2.0Ah | 22 min | 30 min | 18V LITHIUM-ION BL1815N 1.5Ah | 15 min | 30 min | |
| BL4025 2.5Ah | 28 min | 38 min | BL1820B 2.0Ah | 24 min | 45 min | |
| BL4040 4.0Ah | 45 min | 67 min | BL1830B 3.0Ah | 22 min | 60 min | |
| BL4050F 5.0Ah | 50 min | 85 min | BL1840B 4.0Ah | 36 min | 90 min | |
| | | | BL1850B 5.0Ah | 45 min | 110 min | |
| | | | BL1860B 6.0Ah | 55 min | 130 min | |

Cordless Cooler & Warmer Box

CW001G

| | |
|------------------------|---|
| Capacity | 20 L (5.3 gal) |
| Cooling System | Compressor type |
| Cooling Capacity | -18 / -15 / -10 / -5 / 0 / 5 / 10°C (0 / 5 / 15 / 25 / 30 / 40 / 50°F) |
| Warming System | Heater |
| Warming Capacity | 30 / 35 / 40 / 45 / 50 / 55 / 60°C (85 / 95 / 105 / 115 / 120 / 130 / 140°F) |
| Run Time | w/ BL4050F X2, -18°C / 5°C / 60°C: 10h / 28h / 8.5h |
| Cord Length | AC Adapter / Cigar Socket Cable: 2 / 2.5 m (6.5 / 8.2 ft) |
| Dimensions (L x W x H) | 663x341x372 mm (26-1/8x13-3/8x14-5/8") |
| Net weight | 13.5 - 16.1 kg (29.8 - 35.5 lbs.) |

Standard Equipment:
Shoulder Belt, AC Adaptor (country-specific), Cigar Socket Cable

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202109



Large capacity
20 L

IPX4




Powered by 40Vmax XGT Li-Ion battery

Compatible with 4 power sources

1. 40Vmax XGT battery
(two in parallel or one)



2. 18V LXT battery
(two in parallel or one)

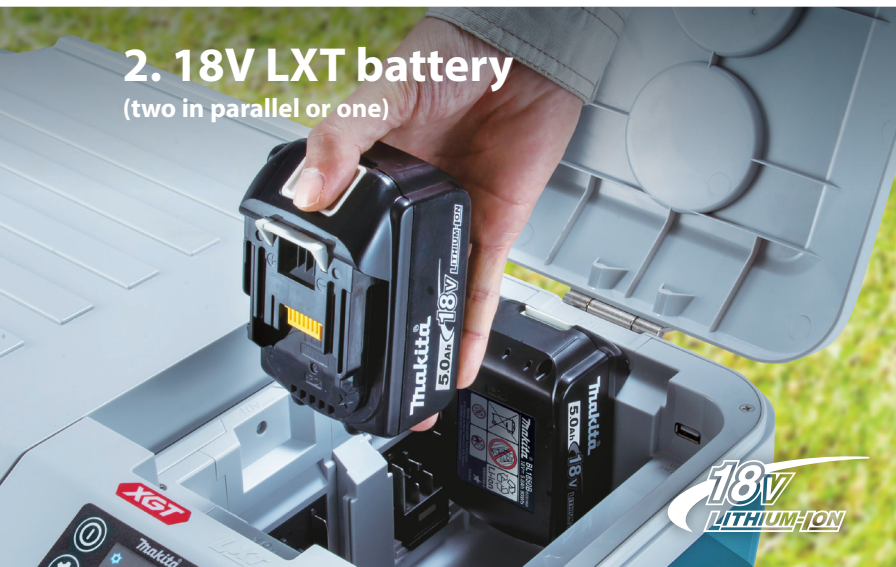

Also can be powered by the combination of one XGT battery and one LXT battery.



3. AC
(through AC adapter)



4. 12V/24V DC
(cigar socket)




-18^{Cool} °C [0°F]



Freeze the ice pack

-10^{Cool} °C [15°F]

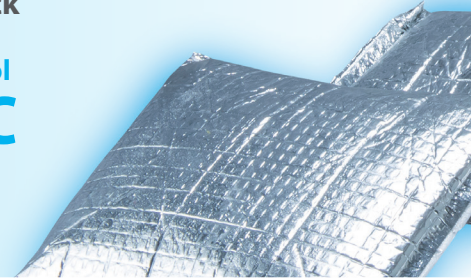

Cool the drink

5^{Cool} °C [40°F]



Warm the caulk tube

30^{Warm} °C [85°F]



Caulk tubes to be warmed must be brand new and unopened. Also caulk tubes must be stored in the box within the storage temperature range recommended by the manufacturer of caulk tubes.*

*Do not store opened caulk tubes with foods because they produce volatile gas.



Work amount on full battery charge

-18°C [0°F] about 10 h | **5°C [40°F] about 28 h** | **60°C [140°F] about 8.5 h**

With two BL4050F batteries



More detailed inside temperature settings

| | Cool storage | | | | | | | Hot storage | | | | | | |
|----|--------------|-----|-----|----|----|----|----|-------------|----|-----|-----|-----|-----|-----|
| °C | -18 | -15 | -10 | -5 | 0 | 5 | 10 | 30 | 35 | 40 | 45 | 50 | 55 | 60 |
| °F | 0 | 5 | 15 | 25 | 30 | 40 | 50 | 85 | 95 | 105 | 115 | 120 | 130 | 140 |

Indication lamps

• Cooling lamp or Warming lamp indicates whether the machine is cooling or warming.
• Power lamp turns on when the machine is powered by external source (from cigar socket or AC socket through AC adapter).



20L (5.3gal) capacity | **IPX4-rated water resistance** | **USB output port**

