



# Cordless Pole Hedge Trimmer

**DUN461W** 460 mm  
**UN460WD** 460 mm



## For tall and hard to reach hedges



**Run time\***

DUN461W / UN460WD  
BL1850B / BL1041B

**122 / 53 min**

**Strokes per minute**

High speed mode (No load speed)

**3,600 min<sup>-1</sup>**

**DUN461W**





**UN460WD**



\*Continuous run time on a single full battery charge/ No load continuous run time (approx)

# Length adjustable telescopic system

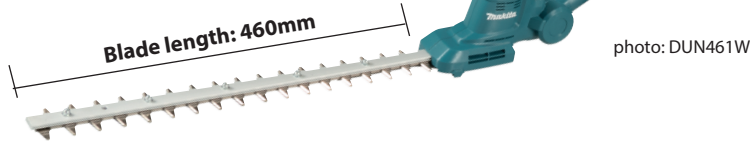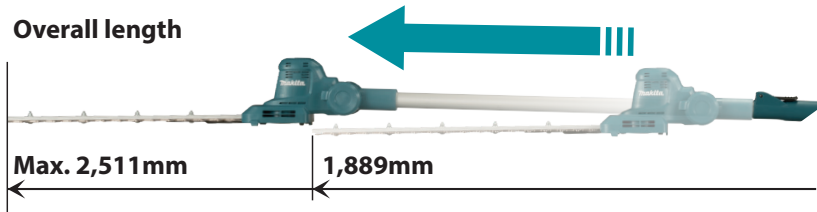


**Lock lever**  
for tool-less easy adjustment of pole extension

**Slide-type front grip**  
position is adjustable for personal fit and comfort maximum work efficiency in different working postures


## Angle adjustable hedge trimmer head

- 60° tilt-up to 75° tilt-down from the horizontal position.
- 10 angle settings (60°, 45°, 30°, 15°, 0°, -15°, 30°-45°, -60°, 75°)

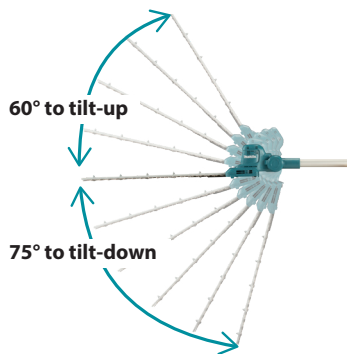

## NEW Chip receiver

- can make it easier for user to collect leaf and twig debris, thanks to:
  - lower height of the connecting hooks
  - reduced step height of the edge of the chip catching plate



# XPT

## eXtreme Protection Technology

Dust and drip-proof performance is enhanced for use in harsh environments.




## Accessories

**Shear blade assembly**  
Part No. 191P00-8

**Blade Cover**  
Part No. 413720-1

**Chip receiver assembly set**  
Part No. 191T43-4



## Cordless Pole Hedge Trimmer

**DUN461W/ UN460WD 460 mm**

<b>Blade Length</b>	460 mm
<b>Max Cutting Capacity</b>	18 mm
<b>Strokes Per Minute (SPM)</b>	3,600
<b>Cycles Per Minute (CPM)</b>	1,800
<b>Continuous Use (min.)</b>	DUN461W: w/ BL1850B: 122 UN460WD: w/ BL1041B: 53
<b>Vibration Level</b>	2.5 m/s <sup>2</sup> or less
<b>Sound Pressure Level</b>	74dB(A)
<b>Dimensions (L x W x H)</b>	1,889 - 2,511 x 87 x 134 mm (74-1/2 - 99 x 3-7/16 x 5-1/4")
<b>Net weight</b>	DUN461W: 3.0 - 3.3 kg (6.6 - 7.3 lbs.) UN460WD: 2.8 - 3.0 kg (6.2 - 6.6 lbs.)

### Standard Equipment :

Blade Cover, Chip Receiver (country-specific), Shear Blade (country-specific), Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge.  
The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.  
Items of standard equipment and specifications may vary by country or area.

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202105