



Optimum power supply system and Optimum charging system

The XGT range of tools and batteries come with a built-in program, providing digital communication between the battery and tool. Allowing not only for the battery to talk with tool but also the tool to talk to the battery. Battery technology and motor engineering that work together for optimum performance.




Optimum charging system

Auto maintenance system with two cooling fans for providing more optimum fast charging

Tool ◀ Battery ▶ Battery Charger
Digital communication

Built Tough

High durability specifications specially designed for 40Vmax Li-Ion batteries

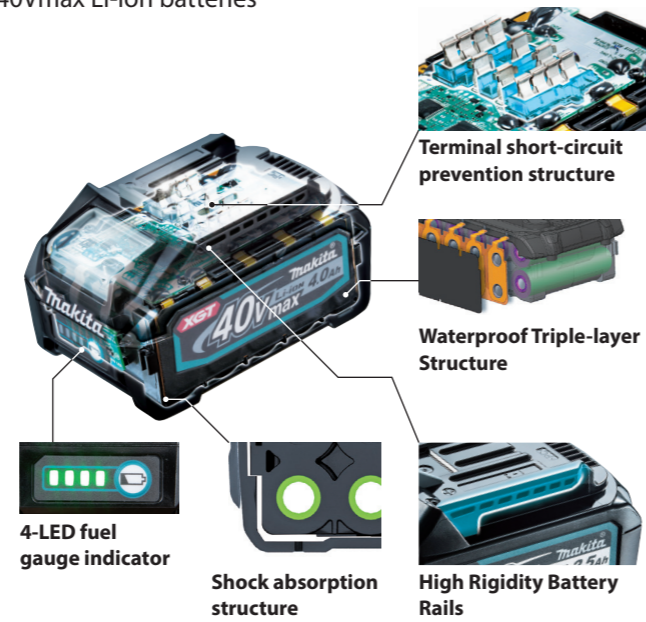

Accessories

Grip assembly set

Part No. 191E41-8



Bit holder

Part No. 452947-8



Charging Time Reference

	DC40RA <small>Fast Charging</small>	DC40RC
*1BL4020 2.0Ah	22min	30min
*1BL4025 2.5Ah	28min	38min
*1BL4040 4.0Ah	45min	67min
BL4050F 5.0Ah	50min	85min

*1 Recommended battery

Cordless Hammer Driver Drill	HP002G 13 mm (1/2")
Cordless Driver Drill	DF002G 13 mm (1/2")
Variable Speed	Built-in Job Light
Brake	Carrying Case
Reversing	
Mechanical 2-Speed	
Keyless Chuck	
Torque Setting 21	
Constant Speed	
Standard Equipment: (+)(-) Bit, Belt Clip, Battery, Charger	
Capacity	HP002G Steel / Wood (Auger Bit) / Wood (Self-Feed Bit) / Wood (Hole Saw) / Masonry: 13 / 38 / 38 / 51 / 13 mm (1/2 / 1-1/2 / 1-1/2 / 2 / 1/2") 1.5 - 13 mm (1/16 - 1/2")
Chuck Capacity	High / Low: 0 - 33,000 / 0 - 9,000
Impacts Per Minute (IPM)	High / Low: 0 - 2,200 / 0 - 600
No Load Speed (RPM)	High / Low: 64 / 30 N·m (570 / 270 in.lbs.)
Max Fastening Torque	65 N·m (580 in.lbs.)
Max Lock Torque	Impact Drilling into Concrete: 9.0 m/s ² Drilling into Metal: 2.5 m/s ² or less
Vibration Level	87 dB(A)
Sound Pressure Level	98 dB(A)
Sound Power Level	w/o Battery: 174 x 86 x 215 mm (6-7/8 x 3-3/8 x 8-1/2")
Dimensions (L x W x H)	w/ BL4040: 174 x 86 x 272 mm (6-7/8 x 3-3/8 x 10-3/4")
Net weight	w/o Battery: 164 x 86 x 215 mm (6-1/2 x 3-3/8 x 8-1/2") w/ BL4040: 164 x 86 x 272 mm (6-1/2 x 3-3/8 x 10-3/4") 1.9 - 2.5 kg (4.2 - 5.5 lbs.)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202101



Cordless Hammer Driver Drill Cordless Driver Drill

Satisfy Professional's Needs



No load speed
High speed mode
2,200
min⁻¹

High speed and Compact



Cordless Hammer Driver Drill
HP002G
13 mm (1/2")



Cordless Driver Drill
DF002G
13 mm (1/2")

Max lock torque
65 N·m

Net weight*
1.9 kg

*model: DF002G / Battery: BL4020



High speed and Compact

All metal gear construction



BL High power
MOTOR Brushless motor



Wood \varnothing 38 mm



Steel \varnothing 13 mm



Spiral step drill \varnothing 22 mm



Tap drill M10

Increased work speed

Rotation speed becomes faster providing increased work speed especially in a light duty application like drilling with a 7/8" ship auger bit.

Increased maneuverability

thanks to compact design

DF002G

164 mm
[HP002G / 174mm]



Cordless Hammer Driver Drill
HP002G




Cordless Driver Drill
DF002G



Single sleeve keyless chuck

Twin LED job light with preglow and afterglow functions



Variable speed control by trigger

Mechanical 2-speed gearing



Aluminum gear housing

Belt clip

XPT eXtreme Protection Technology



XGT
40V^{max}
Li-ion
Powered by
40Vmax XGT Li-ion
battery

