



# Cordless Impact Driver TD111D

## Ultra compact and slim design



Max Fastening Torque

# 135 N·m

## 10.8V LITHIUM-ION

## BL MOTOR

Powered by Slide Li-ion Battery of Makita's New 10.8V Platform



BL1015  
1.5Ah



BL1020B  
2.0Ah



BL1040B  
4.0Ah



DC10SA




DC10WC





# Ultra compact and slim design for easy handling

**Single LED job light**  
with preglow and afterglow functions



135mm

55mm



Predecessor Model

**Variable speed control by trigger**



**Impact power selection:**  
High and low




**BL MOTOR**

**Best possible ergonomic handle for screwing applications**



**A** In order to provide maximum thrust to the bit, the top back of the handle is ergonomically contoured and widened to perfectly fit the U-shape formed between user's thumb and index finger.

**B** Ribbed soft grip enables all finger tips to hold the handle securely against the strong rotational force of counter torque even in single-handed operation.

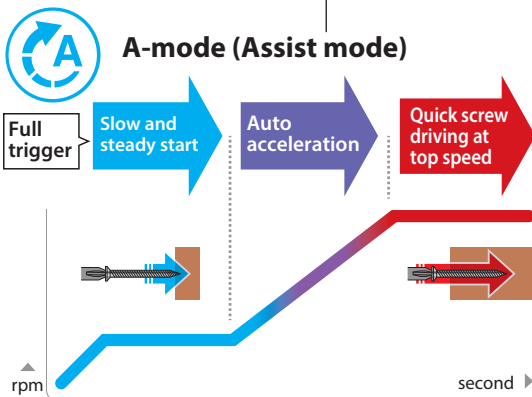

## Li-ion Battery & Charger Time Reference, Compatibility Chart

\*with Battery fuel gauge

|                            | BL1015<br>10.8V 1.5Ah | *BL1020B<br>10.8V 2.0Ah | *BL1040B<br>10.8V 4.0Ah |
|----------------------------|-----------------------|-------------------------|-------------------------|
| <b>CXT</b>                 |                       |                         |                         |
| <b>DC10SA</b><br>for 10.8V | 22min                 | 30min                   | 60min                   |
| <b>DC10WC</b><br>for 10.8V | 50min                 | 70min                   | 130min                  |



## Cordless Impact Driver

## TD111D

- Variable Speed
- Brake
- Reversing
- Electronic 2-Speed
- Built-in Job Light
- Carrying Case

|                                 |   |
|---------------------------------|---|
| <b>Hex Shank</b>                | 6.35 mm (1/4")  |
| <b>No Load Speed (RPM)</b>      | High / Low: 0 - 3,000 / 0 - 1,300   |
| <b>Impacts Per Minute (IPM)</b> | High / Low: 0 - 3,900 / 0 - 1,600   |
| <b>Max Tightening Torque</b>    | 135 N·m (1,200 in·lbs)  |
| <b>Capacity</b>                 | Machine screw : M4 - M8mm (5/32" - 5/16")<br>Standard bolt : M5 - M14 (3/16" - 9/16")<br>High strength bolt : M5 - M12 (3/16" - 1/2")<br>Coarse thread (in length): 22 - 90mm (7/8" - 3-1/2") |
| <b>Vibration Level</b>          | 12.5 m/s <sup>2</sup>   |
| <b>Sound Pressure Level</b>     | 94 dB(A)  |
| <b>Sound Power Level</b>        | 105 dB(A)   |
| <b>¥Dimensions (L x W x H)</b>  | 135x66x210mm (5-5/16"x2-5/8"x8-1/4")  |
| <b>Net weight</b>               | BL1015: 0.97 kg (2.1 lbs)<br>BL1040: 1.1 kg (2.5 lbs)   |

Standard Equipment : Battery, Charger, Belt Clip, Phillips Bit

weight according to EPTA-Procedure 01/ver.2.1  
Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201612



Drilling (Wood/Metal) Accessories



Fastening Accessories



Drill and Screw Bit Sets Accessories