Satisfy Professional's Needs

LXT

Cordless Impact Wrench
DTW210 12.7 mm (1/2")

Compact Size. Professional Power.



Photo: DTW210 with BLB182

Max fastening torque

Battery: BLB182 **230 N•m***

Battery: BL1860B **250 N•m***

*Tightening torque at 6 seconds after seating, when tightening M16 Hex bolt (grade 10.9)

18V LITHIUM-ION

BL MOTOR

XPT

*Except when the BLB182 battery is installed

Built Compact. Designed for Control.

High-power brushless motor

Overall length
130 mm




Driving shank
12.7 mm (1/2") Square drive,
C ring, with Pin hole

LED job light
- Twin LEDs
- With preglow and afterglow functions

Net weight
1.3 kg
Battery: BLB182

Optimal battery location

Compared with the current DTW190, the battery has been repositioned closer to the grip centerline, helping reduce wrist strain during operation.

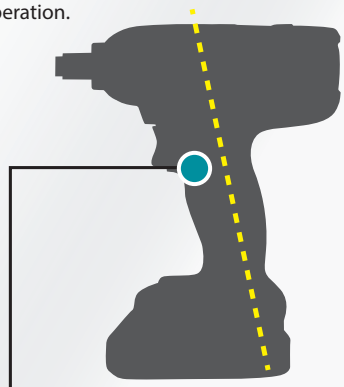

DTW190

Center of gravity



DTW210

* The same features and benefits as those of DTW190.

Photo: DTW210 with BLB182

Charging Time

	Fast Charging DC18RC	DC18SD
BL1815N 1.5Ah	**15** min	**30** min
BL1820B 2.0Ah	**24** min	**45** min
BL1830B 3.0Ah	**22** min	**60** min
BL1840B 4.0Ah	**36** min	**90** min
BL1850B 5.0Ah	**45** min	**110** min
BL1860B 6.0Ah	**55** min	**130** min
Compatible with charger	LXT BASIC DCB18WA only	DCB18WA
BLB182 2.0Ah		**90** min

Charge the LXT batteries with the LXT battery chargers and the LXT BASIC battery with the LXT BASIC battery charger.

18V LITHIUM-ION

XPT

*Except when the BLB182 battery is installed

Cordless Impact Wrench DTW210 12.7 mm (1/2")

- Variable Speed
- Brake
- Reversing
- Built-in Job Light
- Carrying Case

**EN62841-2-2, Mode: impact tightening of fasteners of the maximum capacity of the tool*

Shank / Drive	*Square Drive 12.7 mm (1/2")*
No load speed	*0 - 2,300 min⁻¹*
Fastening capacities	*Standard bolt: M5 - M16 (3/16 - 5/8"),* *High strength bolt: M5 - M14 (3/16 - 9/16")*
Max fastening torque (Battery)	*230 N·m (170 ft.lbs.) (BLB182)* *250 N·m (180 ft.lbs.) (BL1860B)*
Nut-busting torque (Battery)	*350 N·m (260 ft·lbs.) (BLB182)* *400 N·m (300 ft.lbs.) (BL1860B)*
Impacts per minute	*0 - 3,200 min⁻¹*
Vibration level (Uncertainty (K))	*8.0 m/s²* (1.5 m/s²*)*
Sound pressure level	*98 dB(A) (EN62841-2-2)*
Sound power level	*106 dB(A) (EN62841-2-2)*
Uncertainty (K) for Noise	*3 dB(A) (EN62841-2-2)*
Dimensions	*130 x 81 x 233 - 250 mm*
(L x W x H)	*(5-1/8 x 3-3/16 x 9-1/8 - 9-7/8")*
(Battery)	*(BLB182 - BL1860B)*
Net weight (Battery)	*1.3 - 1.6 kg (2.9 - 3.5 lbs.) (BLB182 - BL1860B)*

Standard equipment and accessories, product appearance and specifications may vary by country or region, and all test results, including work amount per charge and work efficiency, are for reference only and may vary depending on application and operating conditions.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202608

www.makita.com