Jig Saw
JV0800 / JV0801

Next-Generation AC Jig Saw





Continuous rating input:
800 W

Up to 40% higher cutting efficiency

Top handle
JV0800



Barrel handle
JV0801



Cordless Jig Saw series

	Top handle	Barrel handle
40V max	**JV002G** 	**JV001G** 
18V	**DJV182** 	**DJV181** 

Accessories

Anti-splitering device
Part No. 192557-6



Guide rule set
Part No. 193516-3



Support base set
Part No. 1915R3-2




Guide rail adapter set
Part No. 193517-1



Part No. 197252-3




Guide rail



Overall length	Part No.
1.0 m	199140-0, 191J16-7
1.4 m	191J17-5, 1917X0-2, 194368-5
1.5 m	199141-8
1.9 m	194925-9, 194926-7, 194915-2
3.0 m	194367-7, 1917X9-4

Repair parts for guide rail

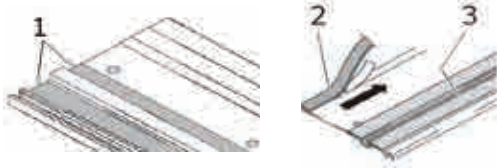

	Item	Part No.
1	Sheet 10 m	194416-0
2	Position sheet 1.4 m	191J53-1, 194418-6, 1917X6-0
	Position sheet 1.9 m	194910-2, 194915-2
	Position sheet 3.0 m	194419-4, 1917X1-0
3	Rubber sheet 10 m	194417-8, 191J54-9

Push clamp set
Part No. 1913K5-7





Rule bar set
Part No. 195842-6



Jig Saw

JV0800 / JV0801

- Double Insulation
- Dust Collection
- Variable Speed
- Built-in Job Light
- Anti-restart function
- Carrying Case
- Constant Speed
- Soft Start
- Orbital Cutting
- Bayonet Shank Jig Saw Blade

	JV0800	JV0801
Continuous rating input	*800 W (110-127 V); 800 W (220-240 V)*	*800 W (220-240 V)*
Stroke length	*26 mm (1")*	*26 mm (1")*
Strokes per minute	*0 - 3,100 min^{-1}*	*800 - 3,100 min^{-1}*
Capacity	*Wood: 170 mm (6-11/16") / Mild steel: 10 mm (3/8")*	*Wood: 170 mm (6-11/16") / Mild steel: 10 mm (3/8")*
	Aluminum: 20 mm (13/16")	*Aluminum: 20 mm (13/16")*
Bevel range	*0 - 45 °*	*0 - 45 °*
Vibration level	*6.4 m/s^2 (EN62841-2-11, Mode: Cutting boards),*	*6.7 m/s^2 (EN62841-2-11, Mode: Cutting boards),*
	4.8 m/s^2 (EN62841-2-11, Mode: Cutting sheet metal)	*5.5 m/s^2 (EN62841-2-11, Mode: Cutting sheet metal)*
Uncertainty (K) for Vibration	*1.5 m/s^2 (EN62841-2-11, Mode: Cutting boards),*	*1.5 m/s^2 (EN62841-2-11, Mode: Cutting boards),*
	1.5 m/s^2 (EN62841-2-11, Mode: Cutting sheet metal)	*1.5 m/s^2 (EN62841-2-11, Mode: Cutting sheet metal)*
Sound pressure level	*89 dB(A) (EN62841-2-11)*	*90 dB(A) (EN62841-2-11)*
Sound power level	*97 dB(A) (EN62841-2-11)*	*98 dB(A) (EN62841-2-11)*
Uncertainty (K) for Noise	*3 dB(A) (EN62841-2-11)*	*3 dB(A) (EN62841-2-11)*
Dimensions (L x W x H)	*240 x 74 x 209 mm (9-1/2 x 2-15/16 x 8-1/4")*	*270 x 76 x 189 mm (10-5/8 x 3 x 7-7/16")*
Net weight	*2.5 kg (5.5 lbs.)*	*2.4 kg (5.3 lbs.)*

Standard Equipment : Jig saw blade set, Hex wrench, Cover plate, Dust nozzle assembly, Kerf board

Standard equipment and accessories, product appearance and specifications may vary by country or region, and all test results, including work amount per charge and work efficiency, are for reference only and may vary depending on application and operating conditions.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202609

www.makita.com


Top handle
JV0800





Barrel handle
JV0801



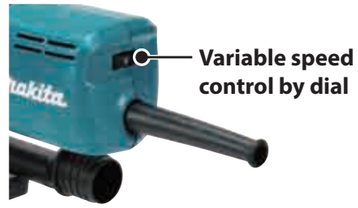



3 Orbital settings + Straight cutting



Optimum cutting action can be selected by simply turning the change lever.

Position	Cutting action	Applications
0	Straight line cutting	Cuts in mild steel, stainless steel and plastics Clean cuts in wood and plywood
I	Small orbital cutting	Cuts in mild steel, aluminum and hard wood
II	Medium orbital cutting	Cuts in wood and plywood Fast cuts in aluminum and mild steel
III	Large orbital cutting	Fast cuts in wood and plywood

Variable speed control by dial




Number	Workpiece
4 - 6	Wood
3 - 6	Mild steel
3 - 4	Stainless steel
3 - 6	Aluminum
1 - 4	Plastics

Toolless blade clamping mechanism



Toolless blade clamping mechanism with anti-return blade holder
Linked with opening of the tool opener, the blade holder rotates up to unlocked position and stays there due to its anti-return mechanism, allowing for quick, toolless one-handed blade changes.

LED job light




(Twin LEDs with light up function during standby mode)

Light reduction function

- Less glare when cutting metal
- Press and hold the main power button for 3 brightness settings.
- Memory function: The tool remembers the job light brightness set last time and the light will light up at that brightness when turned on.


Dust Collection



Dust nozzle can be set to Base firmly with Thumb screw.

Dust nozzle can be attached over the sawdust exhaust port for connection to Makita vacuum cleaner.

Bevel range



0 to 45° left and right.

Anti-restart function