



The image shows a Makita impact wrench in use. A person wearing a black long-sleeved shirt and grey safety gloves is operating the tool. The wrench is black and teal, with the Makita logo prominently displayed. It is attached to a long, silver-colored metal shaft. The person is using the wrench to tighten or loosen a bolt on a yellow metal component. The background is a workshop environment with various tools and equipment visible. The lighting is dramatic, with bright highlights on the tool and the person's hands.

Makita

IMPACT WRENCHES



MOST POWERFUL SYSTEM



40V




80V

OUTPOWER / OUTSMART / OUTLAST



ONE BATTERY

ENDLESS POSSIBILITIES

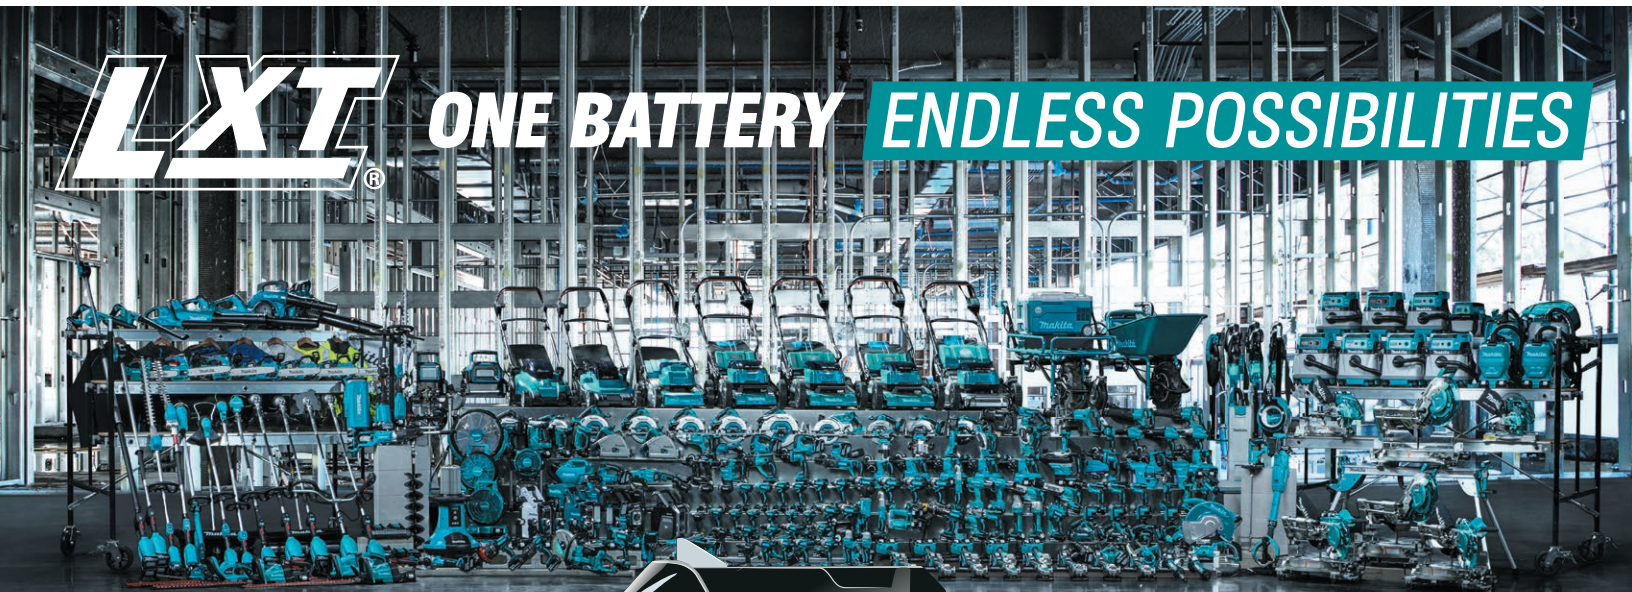

18V



36V

**WORLD'S LARGEST
COMPATIBLE 18V BATTERY SYSTEM**



DTW1005Z

18V 3/4" Impact Wrench

- Fastening Torque: 1,360 N-m (1,000 ft.lbs.)
- Nut-Busting Torq.: 1,700 N-m (1,250 ft.lbs.)
- Speed: 0 - 1,800 / 1,000 / 900 / 800 RPM
- Impacts: 0 - 2,200 / 1,800 / 1,600 IPM



DTW1001Z

18V 3/4" Impact Wrench

- Fastening Torque: 1,250 N-m (920 in.lbs.)
- Nut-Busting Torq.: 1,700 N-m (1,250 ft.lbs.)
- Speed: 0 - 1,800 / 1,000 / 900 RPM
- Impacts: 0 - 2,200 / 2,000 / 1,800 IPM



DTW1002Z

18V 1/2" Impact Wrench

- Fastening Torque: 1,200 N-m (890 in.lbs.)
- Nut-Busting Torq.: 1,600 N-m (1,180 ft.lbs.)
- Speed: 0 - 1,800 / 1,000 / 900 RPM
- Impacts: 0 - 2,200 / 2,000 / 1,800 IPM



DTW800XVZ

18V 7/16" HEX Impact Wrench

- Fastening Torque: 800 N-m (590 ft.lbs.)
- Speed: 0 - 1,800 / 1,000 / 900 RPM
- Impacts: 0 - 2,200 / 2,000 / 1,800 IPM



DTW700Z

18V 1/2" Impact Wrench

- Fastening Torque: 700 N-m (520 ft.lbs.)
- Nut-Busting Torq.: 1,000 N-m (740 ft.lbs.)
- 0 - 2,200 / 1,900 / 1,200 / 500 RPM
- 0 - 2,700 / 2,400 / 1,700 / 1,000 IPM



DTW450Z

18V 1/2" Impact Wrench

- Fastening Torque: 440 N-m (325 ft.lbs.)
- Speed: 1,600 RPM
- Impacts: 2,200 IPM



DTW300Z

18V 1/2" Impact Wrench

- Fastening Torque: 330 N-m (240 ft.lbs.)
- Nut-Busting Torque: 580 N-m (430 ft.lbs.)
- 0 - 3,200 / 2,600 / 1,800 / 1,000 RPM
- 0 - 4,000 / 3,400 / 2,600 / 1,800 IPM



DTWA260Z

18V 1/2" Torque Controlled Imp. Wrench

- Fastening Torque: 260 N-m (190 ft.lbs.)
- Speed: 0 - 2,800 RPM
- Impacts: 0 - 3,400 IPM



DTW251Z

18V 1/2" Impact Wrench

- Fastening Torque: 230 N-m (170 ft.lbs.)
- Speed: 0 - 2,100 RPM
- Impacts: 0 - 3,200 IPM



DTW181Z

18V 1/2" Impact Wrench

- Fastening Torque: 210 N-m (155 ft.lbs.)
- Nut-Busting Torque: 330 N-m (245 ft.lbs.)
- Speed: 0 - 2,400 / 0 - 1,300 RPM
- Impacts: 0 - 3,600 / 0 - 2,000 IPM



DTW190Z

18V 1/2" Impact Wrench

- Fastening Torque: 190 N-m (140 ft.lbs.)
- Nut-Busting Torque: 320 N-m (235 ft.lbs.)
- Speed: 0 - 2,300 RPM
- Impacts: 0 - 3,000 IPM



DTW180Z

18V 3/8" Impact Wrench

- Fastening Torque: 180 N-m (230 ft.lbs.)
- Nut-Busting Torque: 310 N-m (210 ft.lbs.)
- Speed: 0 - 2,400 / 0 - 1,300 RPM
- Impacts: 0 - 3,600 / 0 - 2,000 IPM



DTL301

18V 1/2" Angle Impact Wrench

- Fastening Torque: 310 - 340 N-m
- Nut-Busting Torq.: 500 - 530 N-m
- Speed: 0 - 3,200 / 1,500 / 1,000 RPM
- Impacts: 0 - 4,000 / 2,800 / 1,800 IPM

COMING SOON

DTW210Z 18V 1/2" Impact Wrench



DTW311Z 18V 1/2" Impact Wrench



TW010GZ
6" EXTENDED ANVIL
FOR HARD-TO-REACH FASTENERS



BL MOTOR

TW010GZ

40V 1" Impact Wrench

- Fastening Torque: 2,715 N-m (2,000 ft.lbs.)
- Nut-Busting T.: 2,850 N-m (2,100 ft.lbs.)
- 0 - 1,200 / 850 / 700 / 600 RPM
- 0 - 1,750 / 1,500 / 1,300 / 1,200 IPM



BL MOTOR

TW009GZ

40V 1" Impact Wrench

- Fastening Torque: 2,715 N-m (2,000 ft.lbs.)
- Nut-Busting T.: 2,850 N-m (2,100 ft.lbs.)
- 0 - 1,200 / 850 / 700 / 600 RPM
- 0 - 1,750 / 1,500 / 1,300 / 1,200 IPM



BL MOTOR

TW001GZ

40V 3/4" Impact Wrench

- Fastening Torq: 1,800 N-m (1,330 ft.lbs.)
- Nut-Busting Torq: 2,050 N-m (1,510 ft.lbs.)
- 0 - 1,800 / 1,400 / 1,150 / 950 RPM
- 0 - 2,500 / 2,400 / 2,200 / 1,900 IPM



BL MOTOR

TW011GZ

40V 3/4" Impact Wrench

- Fastening Torque: 1,500 N-m (1,110 ft.lbs.)
- Nut-Busting T.: 1,900 N-m (1,400 ft.lbs.)
- 0 - 1,800 / 1,100 / 700 / 500 RPM
- 0 - 2,600 / 2,000 / 1,400 IPM



BL MOTOR

TW003GZ

40V 1/2" Impact Wrench

- Fastening Torque: 1,360 N-m (1,000 ft.lbs.)
- Nut-Busting Torq: 1,600 N-m (1,180 ft.lbs.)
- 0 - 1,800 / 1,200 / 1,000 / 800 RPM
- 0 - 2,400 / 2,300 / 2,000 / 1,600 IPM



BL MOTOR

TW007GZ

40V 1/2" Impact Wrench

- Fastening Torque: 760 N-m (560 ft.lbs.)
- Nut-Busting Torq: 1,100 N-m (810 ft.lbs.)
- 0 - 2,300 / 1,900 / 1,200 / 600 RPM
- 0 - 2,900 / 2,700 / 1,900 / 1,200 IPM



BL MOTOR

TW004GZ

40V 1/2" Impact Wrench

- Fastening Torque: 350 N-m (260 ft.lbs.)
- Nut-Busting Torq: 630 N-m (465 ft.lbs.)
- 0 - 3,200 / 2,600 / 1,800 / 1,000 RPM
- 0 - 4,000 / 3,400 / 2,600 / 1,800 IPM

COMING SOON

BL MOTOR

TW012GZ 40V 1" Impact Wrench

COMING SOON

BL MOTOR

TW013GZ 40V 1" Impact Wrench

CORDED



TW1000

AC 1" Impact Wrench

- 1,200W
- Fastening Torque: 1,000 N-m (738 ft.lbs.)
- Speed: 1,400 RPM
- Impacts: 1,500 IPM



TW0350

AC 1/2" Impact Wrench

- 400W
- Fastening Torque: 350 N-m (260 ft.lbs.)
- Speed: 2,000 RPM
- Impacts: 2,000 IPM

ACCESSORIES

IMPACT SOCKETS

SUPERIOR STRENGTH | IMPACT-READY PERFORMANCE | LONG-LASTING DURABILITY



1/2" DRIVE

ITEM	DIMENSIONS
E-16047	8mm x 38mm
E-16053	9mm x 38mm
E-16069	10mm x 38mm
E-16075	11mm x 38mm
E-16081	12mm x 38mm
E-16097	13mm x 38mm
E-16106	14mm x 38mm
E-16112	15mm x 38mm
E-16128	16mm x 38mm
E-16134	17mm x 38mm
E-16140	18mm x 38mm
E-16156	19mm x 38mm
E-16162	20mm x 38mm
E-16178	21mm x 38mm
E-16184	22mm x 38mm
E-16190	23mm x 38mm
E-16209	24mm x 38mm
E-16215	27mm x 42mm
E-16221	30mm x 42mm
E-16237	32mm x 44mm

DEEP WELL IMPACT SOCKETS

ITEM	Drive	DIMENSIONS
A-96241	1/2"	7/16" - 3-3/16"
A-96257		1/2" - 3-3/16"
A-96263		9/16" - 3-3/16"
A-96279		5/8" - 3-3/16"
A-96291		3/4" - 3-3/16"
A-96235		3/8" - 3-3/16"
A-99518	3/8"	1/4" - 2-1/2"
A-99524		5/16" - 2-1/2"
A-99546		3/8" - 2-1/2"
A-99552		7/16" - 2-1/2"
A-99568		1/2" - 2-1/2"
A-99574		9/16" - 2-1/2"
A-99580		5/8" - 2-1/2"
A-99605		3/4" - 2-1/2"

3/4" DRIVE

ITEM	DIMENSIONS
E-22224	17 x 51mm
E-22230	19 x 51mm
E-22246	21 x 51mm
E-22252	22 x 51mm
E-22268	24 x 51mm
E-22274	26 x 53mm
E-22280	27 x 53mm
E-22296	30 x 53mm
E-22305	32 x 57mm
E-22311	35 x 57mm
E-22327	36 x 57mm
E-27311	38 x 57mm
E-27327	41 x 58mm
E-22333	19 x 90mm
E-22349	21 x 90mm
E-22355	24 x 90mm
E-27333	26 x 90mm
E-22361	27 x 90mm
E-22377	30 x 90mm
E-22383	32 x 90mm
E-27349	33 x 90mm
E-22399	36 x 90mm

1" DRIVE

ITEM	DIMENSIONS
E-24511	27mm x 60mm
E-24527	30mm x 62mm
E-24533	32mm x 63mm
E-24549	33mm x 63mm
E-24555	34mm x 63mm
E-24561	36mm x 66mm
E-24577	38mm x 66mm
E-24583	40mm x 66mm
E-24599	41mm x 68mm
E-24608	42mm x 68mm
E-24614	44mm x 70mm
E-24620	46mm x 72mm
E-24636	50mm x 76mm
E-24642	55mm x 84mm
E-24658	60mm x 88mm
E-24664	65mm x 92mm
E-24670	70mm x 96mm
E-24686	27mm x 90mm
E-24692	30mm x 90mm
E-24701	32mm x 90mm
E-24717	33mm x 90mm
E-24723	34mm x 90mm
E-24739	36mm x 90mm
E-24745	38mm x 90mm
E-24751	40mm x 90mm
E-22420	41mm x 90mm
E-24767	44mm x 90mm
E-24773	46mm x 90mm
E-24789	50mm x 100mm
E-24795	55mm x 108mm
E-24804	60mm x 108mm
E-24810	65mm x 120mm

PROTECTIVE COVERS



ITEM	COMPATIBILITY
413G38-2	TW001G
413G39-0	DTW700 / TW007G
413G40-5	DTW1001 / DTW1002

SOCKET EXTENSION



ITEM	DIMENSIONS
B-55734	1/2" SQUARE DRIVE / LENGTH 10"
B-55740	1/2" SQUARE DRIVE / LENGTH 6"

SOCKET ADAPTER



ITEM	DESCRIPTION
B-59841	7/16" HEX TO 1/2" FOR IMPACT WRENCH DTW800

LXT BATTERIES & CHARGERS



1.5Ah

196235-0
BL1815N



15 MIN.
CHARGE TIME

2.0Ah

197254-9
BL1820B



25 MIN.
CHARGE TIME

3.0Ah

197599-5
BL1830B



30 MIN.
CHARGE TIME

4.0Ah

197267-0
BL1840B



40 MIN.
CHARGE TIME

5.0Ah

197280-8
BL1850B



45 MIN.
CHARGE TIME

6.0Ah

632F69-8
BL1860B



55 MIN.
CHARGE TIME

9.0Ah

1915H4-0
BL1890



85 MIN.
CHARGE TIME

12.0Ah

1915J2-8
BL18120



120 MIN.
CHARGE TIME

FASTER CHARGE TIME

HIGHEST OUTPUT



DC18SD

Standard Charger

630567-0 (120V) / 630570-1 (240V)



DC18RC

Rapid Charger

196433-6 (120V) / 195584-2 (220V)



DC18SE

Automotive Charger

194618-8



DC18RD

Dual Port Charger

196963-7 (120V) / 196933-6 (220V)



DC18SF

4-Port Charger

196426-3



BATTERIES & CHARGERS



2.0Ah
191L29-0
BL4020



2.5Ah
191B36-3
BL4025



4.0Ah
191B26-6
BL4040



4.0Ah
1910N6-8
BL4040F



TABLESS BATTERY
35%
MORE POWER
45MIN.
CHARGE TIME

5.0Ah
191L47-8
BL4050F



8.0Ah
191X65-8
BL4080F



8.0Ah
1913S3-7
BL4080H



TABLESS BATTERY
35%
MORE POWER
76MIN.
CHARGE TIME



DC40RC
Standard Charger
191M85-6 (120V) / 191M90-3 (240V)



DC40RA
Rapid Charger
191F37-5 (120V) / 191E07-8 (240V)



DC40RB
Dual Port Charger
191N04-8 (120V) / 191N09-8 (240V)

COMPATIBILITY

ADP10 (191C09-2)



Adapts 40V max XGT
chargers to charge
18V LXT batteries



Makita



makitalatinamerica