

A full-page photograph of a miner in a dark, rocky tunnel. The miner is wearing a high-visibility yellow safety vest over a dark long-sleeved shirt, brown work pants, and blue gloves. They are holding a large, teal and black Makita AVT 2500 pneumatic hammer drill, which is positioned vertically and drilling into a rock. The drill has a long, flexible black hose attached to its side. In the background, the rough, uneven rock walls of the mine are visible, along with several hanging industrial lamps that provide illumination. The overall scene conveys a sense of heavy industrial work in a challenging environment.

Makita
MINING
SOLUTIONS

LXT BATTERIES AND CHARGERS



1.5Ah
196235-0
BL1815N



2.0Ah
197254-9
BL1820B



3.0Ah
197599-5
BL1830B



4.0Ah
197267-0
BL1840B



5.0Ah
197280-8
BL1850B



6.0Ah
632F69-8
BL1860B



9.0Ah
1915H4-0
BL1890



12.0Ah
1915J2-8
BL18120



FASTER CHARGING TIME

MAXIMUM PERFORMANCE



DC18SD
Standard Charger
630567-0 (120V) / 630570-1 (240V)



DC18RC
Fast charger
196433-6 (120V) / 195584-2 (220V)



DC18SJ + adp14
LXT® USB-PD Charger
1916D9-8 + 1915U1-7



DC18RD
Two-port charger
196963-7 (120V) / 196933-6 (220V)



DC18SF
4-Port Charger
196426-3



BATTERIES AND CHARGERS



2.0Ah
191L29-0
BL4020



2.5Ah
191B36-3
BL4025



4.0Ah
191B26-6
BL4040



4.0Ah
1910N6-8
BL4040F



5.0Ah
191L47-8
BL4050F



8.0Ah
191X65-8
BL4080F



8.0Ah
1913S3-7
BL4080H



DC40RC
Standard Charger

191M85-6 (120V) / 191M90-3 (240V)



DC40RA
Fast charger

191F37-5 (120V) / 191E07-8 (240V)



DC40RB
Two-port charger

191N04-8 (120V) / 191N09-8 (240V)

COMPATIBILITY

ADP10 (191C09-2)



Allows you to use 40 V max XGT
chargers to charge 18 V LXT
batteries

HM004GZ02

DEMOLITION HAMMER

72.8 J



BL MOTOR **XPT**
EXTRA PROTECTION TECHNOLOGY

XGT X2
80Vmax



It runs on two 40Vmax XGT lithium-ion batteries

AVT Low Vibration
(Anti-vibration technology)

(Anti-vibration technology)

6.5 m/s²

Vibration-damping housing

It offers a combination of high power and low vibration.



Main Switch



Battery Charge
Warning Light

Maintenance warning
light

**SOFT
NO LOAD**

Speed Control of the No-Load Motor.

AWS
AUTO-START WIRELESS SYSTEM

For wireless on/off communication between the tool and the vacuum cleaner.

Demolition Hammer 1-1/8" Hex HM004GZ02

Impact Energy 72.8 J

Impacts per minute 870

Dimensions (L x W x H) 882 x 227 x 540 mm
(34-3/4 x 8-15/16 x 21-1/4")

Net weight w/ BL4020 x2 - BL4080F x2:
29.6 - 32.1 kg (65.3 - 70.8 lbs.)



INCLUDES: HEX KEY.

Does not include: charger, battery, and chisel.

APPLICATIONS: Mineral sampling and furnace cleaning

AVT **SOFT NO LOAD** **AWS** **XPT** **BL MOTOR**



ACCESSORIES

Hex Flat Chisel

D-61575 1-1/8" / 520mm



Hex-Tip Chisel

D-61569 1-1/8" / 520mm




Hex Long-Handled Shovel Chisel

D-20725 1-1/8" / 520mm



Zanco HEX Self-Sharpening Chisel

B-10372 1-1/8" / 400mm





XGT X2
80V_{max}

XGT

40V_{max}



HM002GZ03

13-Kilo SDS Max Demolition Hammer

Impact Energy	20.9 J
Blows Per Minute	950 - 1,900 BPM
Dimensions (L x W x H)	w/BL4040: 574 x 146 x 324 mm (22-5/8 x 5-3/4 x 12-3/4")
Net weight	12.0 - 13.3 kg (26.5 - 29.3 lbs.)

INCLUDES: Side grip, grease, cloth
Does not include: neither charger nor battery.
APPLICATIONS: Ore Sampling and Furnace Cleaning

BL MOTOR **AWS** **AVT** **SOFT NOLOAD** **XPT**



XGT X2
80V_{max}

XGT

40V_{max}



HR006GZ

SDS-MAX Rotary Hammer
52mm (2-1/16")

Impact Energy	21.4 J
Capacity	Concrete with a TCT drill bit: 52 mm (2-1/16") Concrete (con core bit): 160 mm (6-5/16")
Blows Per Minute	1,100 - 2,250 BPM
No-Load Speed	150 - 310 rpm
Dimensions (L x W x H)	w/BL4040: 610 x 140 x 337 mm (24 x 5-1/2 x 13-1/4")
Net weight	12.9 - 14.3 kg (28.4 - 31.5 lbs.)

INCLUDES: Side handle, depth stop, drill bit grease, plastic case.
Does not include a charger or battery.
APPLICATIONS: Ore Sampling and Furnace Cleaning

AFT AWS XPT BL MOTOR **AVT** **SOFT NOLOAD**



XGT

40V_{max}



HM001GM202 / Z

7-Kilo SDS Max Demolition Hammer

Impact Energy	9.4 J
Blows Per Minute	0 - 2,650 BPM
Dimensions (L x W x H)	w/BL4040: 495 x 112 x 257 mm (19-1/2 x 4-3/8 x 10-1/8")
Net weight	6.3 - 7.1 kg (13.9 - 15.7 lbs.)

INCLUDES: Side grip, grease,
HM001GM202: DC40RA Charger, BL4040 4.0Ah Battery
(2-pack), Plastic Carrying Case
HM001GZ does not include: neither charger nor battery.
APPLICATIONS: Ore Sampling and Furnace Cleaning

BL MOTOR **AWS** **AVT** **SOFT NOLOAD** **XPT**



XGT

40V_{max}



HR005GM201 / Z


SDS-MAX Rotary Hammer
40mm (1-9/16")

Impact Energy	8 J
Capacity	Concrete with a TCT drill bit: 40 mm (1-9/16")
Blows Per Minute	1,450 - 2,900 BPM
No-Load Speed	250 - 500 rpm
Dimensions (L x W x H)	w/BL4040: 499 x 117 x 285 mm (19 x 4-5/8 x 11-1/4")
Net weight	7.5 - 8.0 kg (16.53 - 17.6 lbs.)

INCLUDES: Side clamp assembly, side handle, depth stop, cloth, grease.
HR005GM201: DC40RA Charger, BL4040 4.0Ah Battery
(2-pack), Makpac Case
HR005GZ Does not include a charger or battery.
APPLICATIONS: Ore Sampling and Furnace Cleaning

AFT AWS XPT BL MOTOR **AVT** **SOFT NOLOAD**

ACCESSORIES



Chisel for SDS MAX Rotary Hammers and Demolition Hammers

D-36463 300mm

D-36479 450mm

for HM003G, HM001G, HR006G, HR005G



SDS-MAX Flat Chisel, 12"

D-36485

for HM003G, HM001G, HR006G, HR005G



SDS-MAX Self-Sharpening Bit, 16"



SDS-MAX Mining Drill Bits

Monoblock carbide insert



B-61519 1-1/4" x 13"



B-61525 1-1/4" x 21"



E-18007 1-1/4" x 21"



B-61531 1-1/4" x 36"



E-18013 1-1/4" x 36"



E-18029 1-1/4" x 51"

ACCESSORIES



- B-60981** 3/16" x 6" SDS-PLUS Drill Bit
- B-60997** 3/16" x 8" SDS-PLUS Drill Bit
- B-61014** 1/4" x 4" SDS-PLUS Drill Bit
- B-61020** 1/4" x 6" SDS-PLUS Drill Bit
- B-61036** 1/4" x 8" SDS-PLUS Drill Bit
- B-61042** 1/4" x 12" SDS-PLUS Drill Bit
- B-61058** 5/16" x 6" SDS-PLUS Drill Bit
- B-61064** 5/16" x 12" SDS-PLUS Drill Bit
- B-61070** 3/8" x 6" SDS-PLUS Drill Bit
- B-61086** 3/8" x 12" SDS-PLUS Drill Bit
- B-61101** 1/2" x 6" SDS-PLUS Drill Bit
- B-61117** 1/2" x 12" SDS-PLUS Drill Bit
- B-61139** 5/8" x 10" SDS-PLUS Drill Bit
- B-61145** 5/8" x 18" SDS-PLUS Drill Bit



- B-61298** 5-Piece SDS-PLUS Drill Bit Set



- D-08713** 10-inch SDS-PLUS Chisel Bit
- D-08729** 20 x 250 mm Flat Chisel, SDS-PLUS
- D-25616** 50 x 215 mm Flat Chisel, SDS-PLUS

Standard equipment (accessories), specifications, and photographs are subject to change. Accessories may not be included with the tools from the factory, even if they are listed in this catalog.



BCC01 / BCC02
8 PORTS / 12 PORTS

MULTIPLE-CHARGER CASE



Load and transport with Makpac design
Capable of charging all batteries simultaneously across four ports.



AVT AFT AWS XPT BL MOTOR



HR008GZ

Rotary Hammer

30 mm SDS PLUS



40Vmax



Impact Energy	3.9 J
Blows Per Minute	0 - 4500 BPM
Dimensions (L x W x H)	422 x 97 x 242 mm
Net weight	5,2 - 6,8 kg

AVT AFT AWS XPT BL MOTOR



HR011GZ

Rotary Hammer

28 mm SDS PLUS



40Vmax



Impact Energy	3.3 J
Blows Per Minute	0 - 5000 BPM
Dimensions (L x W x H)	391 x 104 x 223 mm
Net weight	3.8 - 5.5 kg

AVT AFT AWS XPT BL MOTOR



HR007GM101 / Z

Rotary Hammer

28 mm SDS PLUS



40Vmax



Impact Energy	3.0 J
Blows Per Minute	0 - 5000 BPM
Dimensions (L x W x H)	473 x 101 x 240 mm
Net weight	3.8 - 4.8 kg

AVT AFT AWS XPT BL MOTOR



Quick-change mandrel

HR009GZ

Rotary Hammer

30 mm SDS PLUS



40Vmax



Impact Energy	3.9 J
Blows Per Minute	0 - 4500 BPM
Dimensions (L x W x H)	439 x 97 x 242 mm
Net weight	5.3 - 6.7 kg

AVT AFT AWS XPT BL MOTOR



Mandril cambio rápido

HR012GZ

Rotary Hammer

28 mm SDS PLUS



40Vmax



Impact Energy	3.3 J
Blows Per Minute	0 - 5000 BPM
Dimensions (L x W x H)	419 x 104 x 223 mm
Net weight	4.0 - 5.4 kg

LXT BL MOTOR XPT



DHR242

Rotary Hammer

24 mm SDS PLUS



18V



Impact Energy	2.0 J
Blows Per Minute	0 - 4700 BPM
Dimensions (L x W x H)	328 x 85 x 213 mm
Net weight	3,1 - 3,8 kg



BL XPT AFT
MOTOR



XGT 40Vmax
HP001G
Hammer drill

Chuck Size	1/2"
Maximum torque	125 N-m (1,100 in.lbs.)
Speed	0 - 2,600 / 0 - 650 RPM
Impacts	0 - 39,000 / 0 - 9,750 IPM

BL XPT AFT
MOTOR



XGT 40Vmax
HP003G
Hammer drill

Chuck Size	1/2"
Maximum torque	180 N-m (1,590 in.lbs.)
Speed	0 - 2,400 / 0 - 1,800 / 0 - 650 RPM
Impacts	0 - 36,000 / 0 - 27,000 / 0 - 9,750 IPM

BL XPT
MOTOR



XGT 40Vmax
TD004G
Impact Driver

Hex Shank	1/4" Hexagonal
Maximum torque	230 N-m (2,040 in.lbs.)
Speed	4 settings up to 3,900 RPM
Impacts	4 settings up to 3,900 IPM

BL XPT
MOTOR



LXT 18V
DHP486
Hammer drill

Chuck Size	1/2"
Maximum torque	125 N-m (1,100 in.lbs.)
Speed	0 - 2,100 / 0 - 550 RPM
Impacts	0 - 31,500 / 0 - 8,250 IPM

BL XPT
MOTOR



LXT 18V
DHP489
Hammer drill

Chuck Size	1/2"
Maximum torque	80 N-m (700 in.lbs.)
Speed	0 - 1,800 / 0 - 550 RPM
Impacts	0 - 27,000 / 0 - 8,250 IPM

BL XPT
MOTOR



LXT 18V
DHP484
Hammer drill

Chuck Size	1/2"
Maximum torque	60 N-m (530 in.lbs.)
Speed	0 - 2,000 / 0 - 500 RPM
Impacts	0 - 30,000 / 0 - 7,500 IPM

BL XPT
MOTOR



LXT 18V
DTD201
Impact Driver

Hex Shank	1/4" Hexagonal
Maximum torque	210 N-m (1,860 ft.lbs.)
Speed	4 settings up to 3,700 RPM
Impacts	4 settings up to 4,400 IPM

Concrete Drill Bits



T-05321

1/4" Hexagonal
Multi-Material Drill Bits
XPS Phillips #2 Torsion
Impact Bits (3")



E-01286

Torsion Tip
Impact XPS Phillips #2 (6")



B-69032

Multi-Material Drill Bit
5/16" x 6"



B-69026 1/4" x 6 HEX MULTI-MATERIAL BIT
B-69048 3/8" X 6 MULTI-MATERIAL HEX BIT
B-69054 1/2" HEX MULTI-MATERIAL BIT, 6-PACK

B-69076

Multi-Purpose Drill Bits
5-PIECE SET OF HEXAGONAL FRAMES
MADE OF VARIOUS MATERIALS



D-24315

Concrete Drill Bit
MASONRY DRILL BIT - 5/32" x 6" HSS



D-24321 MASONRY BIT 3/16" x 3-1/2" HSS
D-24337 MASONRY BIT-3/16" x 6" HSS
D-24343 MASONRY BIT 7/32" x 6" HSS
D-24359 MASONRY BIT 1/4" x 4" HSS
D-24365 MASONRY BIT 1/4" x 6" HSS
D-24371 MASONRY BIT 1/4" x 12" HSS
D-24387 MASONRY BIT 5/16" x 6" HSS
D-24393 MASONRY BIT 5/16" x 12" HSS
D-24402 MASONRY BIT 3/8" x 6" HSS
D-24418 MASONRY BIT- 3/8" x 12" HSS
D-24424 MASONRY BIT 7/16" x 6" HSS
D-24430 MASONRY BIT 1/2" x 6" HSS
D-24446 MASONRY BIT- 1/2" x 12" HSS
D-24452 MASONRY BIT 5/8" x 6" HSS
D-24468 MASONRY BIT 5/8" x 12" HSS
D-24480 MASONRY BIT 3/4" x 12" HSS
D-24496 MASONRY BIT 1" x 12" HSS

Fastening bits

E-00549

Insert Drill Bit
IMPACT XPS PH #1 (1")

IMPACT
XPS®



E-00555 IMPACT XPS PH#2 (1")
E-00561 IMPACT XPS PH#3 (1")
E-00767 IMPACT XPS PH#1 (2")
E-00773 IMPACT XPS PH#2 (2")
E-00789 IMPACT XPS PH#3 (2")
E-00826 IMPACT XPS T10 (2")
E-00832 IMPACT XPS T15 (2")
E-00848 IMPACT XPS T20 (2")
E-00854 IMPACT XPS T25 (2")
E-00876 IMPACT XPS T30 (2")
E-01133 IMPACT XPS PH#1 (3")
E-01149 IMPACT XPS PH#2 (3")
E-01155 IMPACT XPS PH#3 (3")

E-01644

Fastening Bit Set
IMPACT XPS 60PC. IMPACT BIT



E-01650

Fastening Bit Set
IMPACT XPS 45PC. IMPACT BIT



E-01666

Fastening Bit Set
IMPACT XPS 35PC. IMPACT BIT



XGT X2
80Vmax



It runs on two 40Vmax XGT lithium-ion batteries

Anti-vibration housing

Equipped with shock absorbers that dampen vibrations in both the rear and front grips.

XPT

Extreme protection technology.



ELECTRIC BRAKE

Protection against dust and water droplets when working outdoors.

AWS

Automatic Wireless Ignition System

ACCESSORIES

14" Segmented Diamond Blade, General Purpose

D-56998 (CE001G)
350 x 25,4 x 7,5 mm



14" Thin Segmented Diamond Blade - General Purpose

E-16748 (CE001G)
14" Segmented, Multipurpose



9" Segmented Diamond Blade for Concrete

E-02967 (CE003G)
230 mm



9" Segmented Diamond Blade, General Purpose

E-02515 (CE003G)
9" Segmented, General Purpose



CORDLESS POWER CUTTER

CE001G / CE003GZ202

CE001G
MAXIMUM CUTTING CAPACITY
127mm

CE003GZ202
MAXIMUM CUTTING CAPACITY
88mm

For Cutting and Sampling

LED Work Light



LED Light Switch



XGT

80Vmax

Includes connector. Equipped with a water supply kit.



The LED work light can be turned on and off using a button located on the rear handle.

Unlock button

It turns off automatically if the switch trigger is not pressed within 60 seconds.



Cordless Concrete Cutter

CE001G / CE003GZ202

	CE001G	CE003GZ202
Blade Diameter	355mm (14")	230mm (9")
Maximum Cutting Capacity	127mm	88 mm
No-Load Speed	5,000 RPM	6600 RPM
Dimensions (L x W x H)	w/ BL4050F: 786 x 272 x 433mm	603 x 240 x 350 mm
Net Weight	12.3 - 14.1 kg	6,4 - 7,4 kg

INCLUDES: Clamp, hose connector (water inlet), water supply kit.
CE001G: Segmented Diamond Blade, Part No. D-56998.
None of the models include a charger or battery.

XGT BL MOTOR XPT AFT AWT



GA038GZ

Cordless Angle Grinder

40Vmax



Disc diameter	230 mm (9")
No-Load Speed	6600 rpm
Switch Type	Trigger switch
Net Weight	4.6 - 7.4 kg

XGT BL MOTOR AFT AWT



GA022GZ

Cordless Angle Grinder

40Vmax



Disc diameter	115 mm (4-1/2")
No-Load Speed	3,000 - 8,500 rpm
Switch Type	Slide Switch
Net Weight	3.0 - 3.6 kg

XGT BL MOTOR AFT AWT XPT



GA049GZ

Cordless Angle Grinder

40Vmax



Disc diameter	115mm (4-1/2")
No-Load Speed	11,000 rpm
Switch Type	Paddle Switch
Net Weight	3.0 - 5.4 kg

LXI BL MOTOR ADT AFT



XLOCK

DGA469Z

Cordless Angle Grinder

18V



Disc diameter	115mm (4-1/2")
No-Load Speed	3,000 - 8,500 rpm
Switch Type	Paddle Switch
Net Weight	2.5 - 3.1 kg

XGT BL MOTOR AFT AWT



GA037GZ

Cordless Angle Grinder

40Vmax



Disc diameter	180 mm (7")
No-Load Speed	7,800 rpm
Switch Type	Trigger switch
Net Weight	4.4 - 5.4 kg

XGT BL MOTOR AFT AWT XPT



GA012GZ

Cordless Angle Grinder

40Vmax



Disc diameter	115 mm (4-1/2")
No-Load Speed	8,500 rpm
Switch Type	Paddle Switch
Net Weight	3.0 - 3.6 kg

LXI BL MOTOR ADT AFT XPT



DGA454Z

Cordless Angle Grinder

18V



Disc diameter	115 mm (4-1/2")
No-Load Speed	8,500 rpm
Switch Type	Slide Switch
Net Weight	2,2 - 3,7 kg

XGT BL MOTOR XPT AFT AWT



GA004GZ

Cordless Angle Grinder

40Vmax



Disc diameter	115 mm (4-1/2")
No-Load Speed	8,500 rpm
Switch Type	Slide Switch
Net Weight	2.9 - 3.5 kg

XGT AWT AFT BL MOTOR XPT



GA028GZ

Cordless Angle Grinder

40Vmax



Disc diameter	115mm (4-1/2")
No-Load Speed	3,000-8,500 rpm
Switch Type	Paddle Switch
Net Weight	3.0 - 3.6 kg

LXI BL MOTOR ADT AFT XPT




DGA455Z

Angle Grinder

18V



Disc diameter	115mm (4-1/2")
No-Load Speed	8,500 rpm
Switch Type	Paddle Switch
Net Weight	2.24 - 2.92 kg

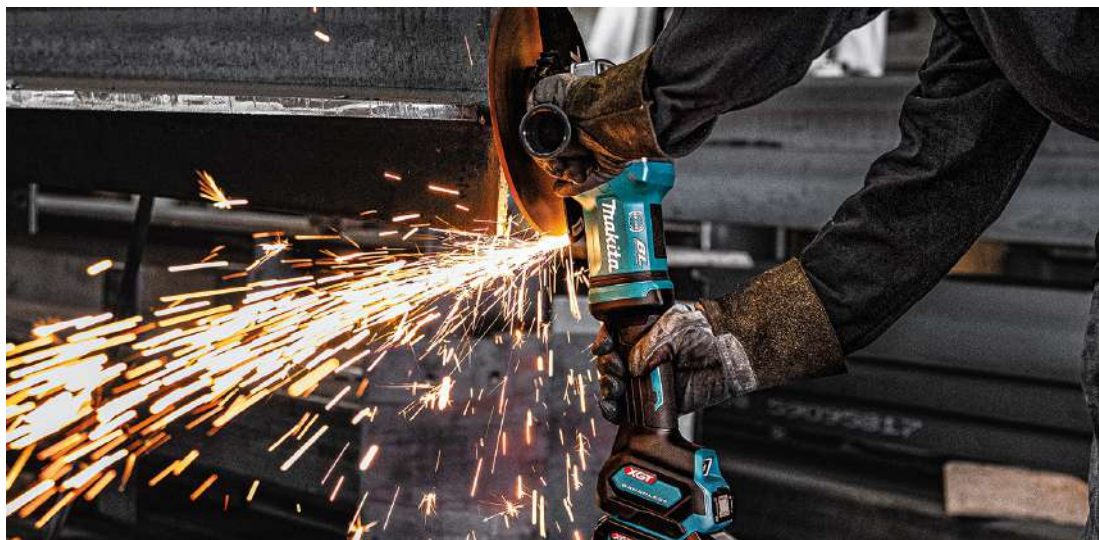

ACCESSORIES

Wire Cups



- D-26515** 2-1/2" x 5/8" Crimped Wire Brush
- D-26521** 3" x 5/8" Crimped Wire Brush
- D-26537** 2-1/2" x 5/8" Braided Wire Brush
- D-26543** 3" x 5/8" Braided Wire Brush

Abrasive Discs



- A-80640** 4-1/2" x 6mm Steel / Stainless Steel Abrasive Discs
- A-90364** 4-1/2" x 6mm Steel Abrasive Disc

Flap Discs



- D-63747** 4-1/2" 40G Flap Disc
- D-63753** 4-1/2" 60G Flap Disc
- D-63769** 4-1/2" 80G Flap Disc
- D-63775** 4-1/2" 120G Flap Disc
- D-53724** 4-1/2" 40G Flap Disc
- D-53730** 4-1/2" Flap Disc 60G
- D-53746** 4-1/2" Flap Disc 80G
- D-53752** 4-1/2" Flap Disc 120G
- D-53855** 7" Flap Disc 120G

Flat Cutting Discs



- D-72001** 4-1/2" x 1 mm Steel/Stainless Steel Cutting Disc WA46R
- E-03034** 4-1/2" x 1 mm Steel/Stainless Steel Cutting Disc A60U
- E-17114** 4-1/2" x 1 mm Steel/Stainless Steel Cutting Disc A60V
- B-14102-10** 4-1/2" x 1.6 mm Steel Cutting Disc (10 pcs)
- B-45755** 4-1/2" x 1.6 mm Steel / Stainless Steel Cutting Disc

Cavity-Center Cutting Discs



- E-24991** 4-1/2" x 1 mm Steel/ Stainless Steel Cutting Disc
- D-80008** 4-1/2" x 3 mm Steel/ Stainless Steel Cutting Disc

Accessories for X-Lock Grinders



- E-00371** 4-1/2" x 6 mm Grinding Wheel
- E-00387** 4-1/2" x 1 mm Cutting Wheel (Steel / Stainless Steel)
- E-02060** 4-1/2" Segmented Diamond Wheel

Diamond Blades



- B-69593** 4-1/2" Segmented Diamond Blade, General Purpose
- B-69624** 7" Segmented Diamond Blade, General Purpose
- E-02515** 9" Segmented Diamond Blade, General Purpose



EARTH AUGERS

DG002GZ / DG001GZ10

0 - 400 /
1500 RPM

MAXIMUM
DRILLING
CAPACITY
200mm



DG002GZ

Earth Augers


55 / 136 Nm

XGT 40Vmax

Max. Drilling Capacity	200mm
Capacity (low)	Clay soil
No-Load Speed	0 - 400 / 0 - 1500 rpm
Maximum Torque	136 N-m (1.210 in.lbs)
Dimensions (L x W x H)	842 x 605 x 194 mm (33-1/4 x 23-3/4 x 7-5/8")
Net Weight	6.8 - 8.0 kg (15.0-17.6 lbs.)



XGT **BL** **ADT** **XPT**

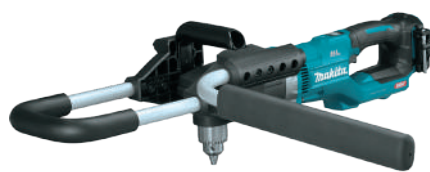

DG001GZ10

Earth Augers

55 / 136 Nm

XGT 40Vmax

Max. Drilling Capacity	200mm
Capacity	Clay soil
Chuck Capacity	2 - 13 mm (1/16 - 1/2")
Maximum Torque (Low)	136 N-m (1.210 in.lbs)
Dimensions (L x W x H)	788 x 605 x 199 mm (31 x 23-3/4 x 7-7/8")
Net Weight	7.2 - 8.1 kg (15.9 - 17.9 lbs.)



XGT **BL** **ADT** **XPT**



VR001G

Concrete Vibrator

XGT 40Vmax

Vibrations per minute	12000 - 15500 rpm
Vibrator shaft diameter	32 - 38 mm
Dimensions (L x W x H)	282 x 112 x 258 mm
Net weight	4,8 - 7,8 kg



XGT **BL** **ADT** **XPT**



VR004GZ

Concrete Vibrator

XGT 40Vmax

Vibrations per minute	12000 - 15500 rpm
Vibrator shaft diameter	38mm
Dimensions (L x W x H)	282mm
Net weight	4.5kg



XGT **BL** **ADT** **XPT**

ACCESSORIES

E-07294

Drill

100 x 800 mm



E-07303

Drill

150 x 800 mm



E-25535

Drill

200 x 800 mm



E-07325

Extension drill bit

540 mm



E-25541

Pin for Drill Bit Extension

50 x 20 x 50 mm



1910C4-5

8' Flexible Assembly

1-1/2" Head Diameter



1910E3-1

4' Flexible Hose

1-1/2" Head Diameter



TW010GZ / TW009GZ

CORDLESS IMPACT WRENCH

NUT-BUSTING TORQUE
4,000N.m
 (2,950 FT. LBS.)



XGT

For tightening large-diameter screws

Automatic stop system available in both forward and reverse rotation modes.

3 reaction time modes for automatic stop are available for both forward and reverse rotation.

Forward

Reverse

MODE 1	With an impact power rating of 2, the tool automatically stops as soon as it detects the first impact.	With an impact power rating of 4, the tool stops automatically as soon as the impact is complete.
MODE 2	With an impact power rating of 3, the tool automatically stops approximately 0.5 seconds after it detects the first impact.	With an impact power of 4, the tool automatically stops approximately 0.2 seconds after it stops impacting.
MODE 3	With an impact power rating of 4, the tool automatically stops approximately 1.0 second after it detects the first impact.	With an impact power rating of 4, the tool automatically reduces its speed once the impact has stopped.

For the reverse rotation mode (for loosening), the reaction time is set to maximum impact power level 4, which is the maximum capacity, because no adjustment to the impact power is required for this mode.

Cordless impact wrench

TW010GZ / TW009GZ

¡NEW!

XGT

40Vmax

Chart	25.4 mm (1")
No-load speed	Max / Strong / Medium / Soft: 0 - 1,200 / 0 - 850 / 0 - 700 / 0 - 600 rpm
Impacts per minute	Max / Strong / Medium / Soft: 0 - 1,750 / 0 - 1,500 / 0 - 1,300 / 0 - 1,200 gpm
Max Fastening Torque	3,150 N·m (2,323 ft.lbs.)
Nut-Busting Torque	4,000 N·m (2,950 ft.lbs.)
Dimensions (L x W x H)	TW010G: 570 x 135 x 276 mm (22-1/2 x 5-5/16 x 10-7/8") TW009G: 435 x 135 x 297 mm (17-1/8 x 5-5/16 x 11-3/4")
Net weight	TW010G: 12.0 - 12.9 kg (26.5 - 28.4 lbs.) TW009G: 11.0 - 11.9 kg (24.3 - 26.2 lbs.)



BL MOTOR XPT


4,000 N.m

INCLUDES: Hook, D-handle

TW009GZ / TW010GZ: DC40RA Charger, BL4050F 5.0Ah Battery (2 pcs.).

TW009GZ / TW010GZ Do not include a charger or battery

By pressing the button



4-level electronic impact power selection

In both forward and reverse rotation modes, you can select the impact strength: maximum (4), strong (3), medium (2), or gentle (1).

By pressing the button

Variable speed / Maximum speed

- Maximum speed is reached with less pressure on the trigger, which reduces fatigue during continuous operation.


- You can select either variable-speed mode or maximum-speed mode depending on the application.



LED Ring Light Button

With pre-brightness, glare, and light mode functions.

Full-speed lamp

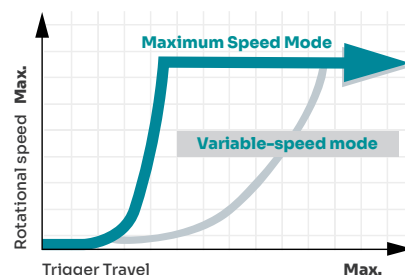

LED Ring Light

Provides a better view of the workpiece and workspace with 360° lighting



Extreme Protection Technology

Protection against dust and water droplets when working outdoors.

3/4"

XGT BL MOTOR XPT

TW001GM201-Z

Impact wrench

40Vmax



Max Fastening Torque

1,800 N-m (1,330 ft.lbs.)

Nut-Busting Torque

2,050 N-m (1,510 ft.lbs.)

Speed

0 - 1,800 / 1,400 / 1,150 / 950 RPM

Impacts

0 - 2,500 / 2,400 / 2,200 / 1,900 IPM

1/2"

XGT BL MOTOR XPT

TW007GZ

Impact wrench

40Vmax



Max Fastening Torque

760 N-m (560 ft.lbs.)

Nut-Busting Torque

1,100 N-m (810 ft.lbs.)

Speed

0 - 2,300 / 1,900 / 1,200 / 600 RPM

Impacts

0 - 2,900 / 2,700 / 1,900 / 1,200 IPM

1/2"

LXI BL MOTOR

DTW1002Z

Cordless Impact Wrench

18V



Max Fastening Torque

1,200 N-m (890 in.lbs.)

Nut-Busting Torque

1,600 N-m (1,180 ft.lbs.)

Speed

0 - 1,800 / 1,000 / 900 RPM

Impacts

0 - 2,200 / 2,000 / 1,800 IPM

1/2"

LXI BL MOTOR XPT

DTW300Z

Impact wrench

18V



Max Fastening Torque

330 N-m (240 ft.lbs.)

Nut-Busting Torque

580 N-m (430 ft.lbs.)

Speed

0 - 3,200 / 2,600 / 1,800 / 1,000 RPM

Impacts

0 - 4,000 / 3,400 / 2,600 / 1,800 IPM

3/4"

XGT BL MOTOR XPT

TW011GZ

Impact wrench

40Vmax



Max Fastening Torque

1,500 N-m (1,110 ft.lbs.)

Nut-Busting Torque

1,900 N-m (1,400 ft.lbs.)

Speed

0 - 1,800 / 1,100 / 700 / 500 RPM

Impacts

0 - 2,600 / 2,000 / 1,400 IPM

1/2"

XGT BL MOTOR XPT

TW004GZ

Impact wrench

40Vmax



Max Fastening Torque

350 N-m (260 ft.lbs.)

Nut-Busting Torque

630 N-m (465 ft.lbs.)

Speed

0 - 3,200 / 2,600 / 1,800 / 1,000 RPM

Impacts

0 - 4,000 / 3,400 / 2,600 / 1,800 IPM

3/4"

LXI BL MOTOR XPT

DTW1005Z

Impact wrench

18V



Max Fastening Torque

1,360 N-m (1,000 ft.lbs.)

Nut-Busting Torque

1,700 N-m (1,250 ft.lbs.)

Speed

0 - 1,800 / 1,000 / 900 / 800 RPM

Impacts

0 - 2,200 / 1,800 / 1,600 IPM

1/2"

XGT BL MOTOR XPT

TW003GZ

Impact wrench

40Vmax



Max Fastening Torque

1,360 N-m (1,000 ft.lbs.)

Nut-Busting Torque

1,600 N-m (1,180 ft.lbs.)

Speed

0 - 1,800 / 1,200 / 1,000 / 800 RPM

Impacts

0 - 2,400 / 2,300 / 2,000 / 1,600 IPM

3/4"

LXI BL MOTOR

DTW1001Z

Impact Wrench

18V



Max Fastening Torque

1,250 N-m (920 in.lbs.)

Nut-Busting Torque

1,700 N-m (1,250 ft.lbs.)

Speed

0 - 1,800 / 1,000 / 900 RPM

Impacts

0 - 2,200 / 2,000 / 1,800 IPM

1/2"

LXI BL MOTOR XPT

DTW700Z

Impact wrench

18V



Max Fastening Torque

700 N-m (520 ft.lbs.)

Nut-Busting Torque

1,000 N-m (740 ft.lbs.)

Speed

0 - 2,200 / 1,900 / 1,200 / 500 RPM

Impacts

0 - 2,700 / 2,400 / 1,700 / 1,000 IPM

Impact Socket



E-16047 1/2" 8 mm x 1-1/2"

E-16053 1/2" 9 mm x 1-1/2"

E-16069 1/2" 10 mm x 1-1/2"

E-16075 1/2" 11 mm x 1-1/2"

E-16081 1/2" 12 mm x 1-1/2"

E-16097 1/2" 13 mm x 1-1/2"

E-16106 1/2" 14 mm x 1-1/2"

E-16112 1/2" 15 mm x 1-1/2"

E-16128 1/2" 16 mm x 1-1/2"

E-16134 1/2" 17 mm x 1-1/2"

E-16140 1/2" 18 mm x 1-1/2"

E-16156 1/2" 19 mm x 1-1/2"

E-16162 1/2" 20 mm x 1-1/2"

E-16178 1/2" 21 mm x 1-1/2"

E-16184 1/2" 22 mm x 1-1/2"

E-16190 1/2" 23 mm x 1-1/2"

E-16209 1/2" 24 mm x 1-1/2"

E-16215 1/2" 27 mm x 1-5/8"

E-16221 1/2" 30 mm x 1-5/8"

E-16237 1/2" 32 mm x 1-3/4"

E-24686 1" (27 mm x 90 mm)

E-24701 1" (32 mm x 90 mm)

E-24745 1" (38 mm x 90 mm)



DWR180Z

Drive Ratchet

18V • 47.5 N·m / 9.5 mm (3/8")

Maximum output power	330 W
Insertion chart	9.5 / 6.35 mm (3/8 / 1/4")
Maximum Fastening Torque	47.5 N·m (420 in.lbs.)
No-load speed	0 - 800 RPM

INCLUDES: Adapter, accessory pouch.

DWR180Z does not include a charger or battery



DGP180

Grease Gun

18V • 410 g • 690 bar

Hose Length	1,2 m
Flow Rate	145 / 290 ml/min
Sound Pressure Level	79 dB(A)



GP001GZ

Grease Gun

350 ml/min • 690 bar

XGT 40Vmax

Hose Length	1,2 m
Flow Rate	145 / 220 / 290 / 350 ml/min
Sound Power Level	89 dB(A)
Sound Pressure Level	81 dB(A)

INCLUDES: Shoulder bag.

GP001GZ Do not include a charger or battery



DCS553Z

Metal cutter

18V • 150 mm • 4.200 rpm

Max. Cutting Depth at 90°	57,5 mm
Blade Diameter	150 mm
Sound Power Level	114 dB(A)
Sound Pressure Level	106 dB(A)



CS002GZ

Metal Cutter

185 mm (7-1/4")

XGT 40Vmax

Disc diameter	185 mm (7-1/4")
Max. cutting capacity	0°: 67 mm (2-5/8")
No-load speed	3,500 rpm

INCLUDES: TCT disc, hex wrench, safety goggles.

Do not include a charger or battery.



DJR189Z

Recipro Saw

18V • 0 - 3.100 rpm • 22 mm

Max. cutting capacity in wood (90°)	255 mm
Max. cutting capacity in steel pipe	130 mm

Sound power level	99 dB(A)
Sound pressure level	88 dB(A)



DJR187Z

Recipro Saw

18V • 0 - 3.000 rpm • 32 mm

Max. cutting capacity in wood (90°)	255 mm
Max. cutting capacity in steel pipe	130 mm

Sound power level	95 dB(A)
Sound pressure level	87 dB(A)



JR001GM201 / Z

Recipro Saw

0 - 3.000 rpm • 32 mm

XGT 40Vmax

Strokes per minute	High / Low: 0-3,000 / 0-2,300 cpm
--------------------	-----------------------------------

Capacity	Wood: 255 mm (10") Pipe: 130 mm (5-1/8")
----------	--

INCLUDES: Set of saw blades B-05153, B-05044, and B-05038.

Do not include a charger or battery.



JR002GZ

Recipro Saw

0 - 3.000 rpm • 32 mm

XGT 40Vmax

Max. Cutting Capacity for Wood	255 mm
Max. Cutting Capacity for Steel Pipe	130 mm

Sound Power Level Sound	98 dB(A)
Pressure Level	87 dB(A)



ACCESSORIES

E-12815

7-1/4" blade



E-12821

7-1/4" blade



A-96095

5-7/8" blade



D-80298

Reciprocating saw blade for metal

D-80307
D-80313
D-80329
D-80335
D-80341



MP001GZ



MP001GZ

Inflator

XGT 40Vmax



Maximum Flow Rate	24 L/min
Maximum Pressure	11,1 bar
Dimensions	329 x 108 x 231 mm
Net Weight	2,9 - 4,1 kg



DMP181Z

Inflator

18V • 161 psi

Maximum Flow Rate	22 L/min
Maximum Pressure	11,1 bar
Dimensions	316 x 108 x 231 mm
Net Weight	2,5 - 2,8 kg



HW001GZ

Pressure Washer

XGT 40Vmax



Maximum Flow Rate	7,0 L/min
Maximum Pressure	115 bar
Dimensions	344 x 383 x 520 mm
Net Weight	10,3 - 13,4 kg



DHW180Z01

Pressure Washer

18V • 348 psi

Maximum Flow Rate	3,0 L/min / 5,3 L/min
Maximum Pressure	24 bar
Dimensions	888 x 99 x 239 mm
Net Weight	2,3 - 2,7 kg



UB001GZ

Blower

XGT 40Vmax



No-Load Speed	0 - 20000 / 23000 min ⁻¹
Max. Air Speed	64 m/s
Dimensions	917 - 1017 x 167 x 297 mm
Net Weight	3,1 - 4,5 kg



DUB184Z

Blower

18V • 52,1 m/s • 13,0 m³/min

No-Load Speed	0 - 18000 min ⁻¹
Max. Air Speed	52,1 m/s
Dimensions	825 x 160 x 285 mm
Net Weight	2,5 - 3,0 kg



AS001GZ

AS001GZ

Dust Blower

XGT 40Vmax



Air Volume	0,6 / 0,8 / 1,0 / 1,1 m³/min
Air Speed	200 m/s
Air Pressure	0,297 bar
Blowing Force	1,1 / 1,7 / 2,3 / 2,8 N
Maximum Sealing Suction	103 mbar
Continuous Use (min)	50 / 25 / 17 / 13 min
Dimensions	180 x 94 x 300 mm
Net Weight	1,5 - 2,9 kg



DAS180Z

Dust Blower

18Vmax



Air Volume	0,6 / 0,8 / 1,0 / 1,1 m³/min
Air Speed	200 m/s
Air Pressure	0,297 bar
Blowing Force	1,1 / 1,7 / 2,3 / 2,8 N
Maximum Sealing Suction	103 mbar
Continuous Use (min)	55 / 30 / 20 / 15 min
Dimensions	179 x 92 x 297 mm
Net Weight	1,2 - 1,7 kg



ACCESSORIES FOR AS001GZ AIR BLOWER

191X11-1

Nozzle for tight spaces



191X25-0

Deflation nozzle



191X13-7

7mm Nozzle



191X29-2

Type C filter



191X15-3

13mm Nozzle



191X21-8

Flexible nozzle



191X17-9

Nozzle with pressure valve



191X23-4

Complete Vent Hose Set



191X19-5

6mm wide nozzle



191X78-9

Long nozzle





*None of them include a charger or battery.

LIGHTING



DESCRIPTION

No. Part

Work light

Luminous flux 3000 / 1700 / 900 Lm
Brightness 1250 / 750 / 400 lx
Dimensions 573 x 658 x 1250/2240 mm
Net weight 6,4 - 9,9 kg

DML814
LXT

Lighting

Lumens (High/Medium/Low) 5,500 / 3,000 / 1,500 Lm
Runtime 18min

DML810
LXT

Work light

Luminous flux 10 000 / 4000 / 2000 Lm
Luminance 4300 / 1900 / 1000 lx

ML009G
XGT LXT

Work light

Luminous flux 3600 / 1800 / 900Lm
Luminance 2100 / 1000 / 500 lx

ML005GZ
XGT LXT

Work light

Luminous flux 1100 / 450Lm
Luminance 1900 / 800 lx

ML003G
XGT

Flashlight

Luminous flux 600 / 1000 / 1250Lm
Luminance 520 / 60000 / 82000 lx

ML007G
XGT

Flashlight

Luminous flux 160Lm
Luminance 3000 lx

ML001G
XGT

DESCRIPTION

No. Part

Work Flashlight

Luminous flux 710 / 130 Lm
Luminance 1900 / 310 lx

ML002G
XGT

Flashlight

Luminous flux 100 / 250 / 500 Lm
Luminance 180 / 400 / 800 lx

ML006G
XGT

Magnetic Flashlight

Luminous flux 1200 / 800 / 500 Lm
Luminance 1750 / 1150 / 700 lx

ML013G
XGT

Radio with Wireless Lamp

Frequency Band FM: 87.5-108 MHz AM: 522-1,710 kHz
Lighting Flashlight, warm white, 4 sides: 130 lx or more

DMR055
LXT XPT

Cordless headlamp

Luminous flux 100 Lm
Luminance 2000 lx

DML800
LXT

Flashlight

Luminous flux 1250 / 1000 / 600 Lm
Runtime (High/Medium/Low) 4 / 4 / 7 hrs

DML812
LXT

Magnetic Flashlight

Luminous flux 1200 / 800 / 500 Lm
Luminance 1750 / 1150 / 700 lx

DML819
LXT



DCU602

DCU602

Wheelbarrow

18V x2 • 180 kg • 0 - 1,5 / 5,0 km/h

Maximum Load Capacity	180 kg
Forward Travel Speed	0 - 1,5 / 3,5 / 5,0 km/h
Reverse Travel Speed	0 - 1 km/h
Dimensions	1480 x 730 x 820 - 1030 mm
Net Weight	144 kg

LXT BL MOTOR XPT



DCU604

DCU604

Wheelbarrow

18V X2 • 180 kg • 0 - 1,5 / 3,5 / 5,0 km/h

Maximum Load Capacity	180 kg
Forward Travel Speed	0 - 1,5 / 3,5 / 5,0 km/h
Reverse Travel Speed	0 - 1 km/h
Dimensions	1450 - 1600 x 730 - 1080 x 820 - 1030mm
Net Weight	117 kg

LXT BL MOTOR

Makita



[makitalatinamerica](https://www.makitalatinamerica.com)